

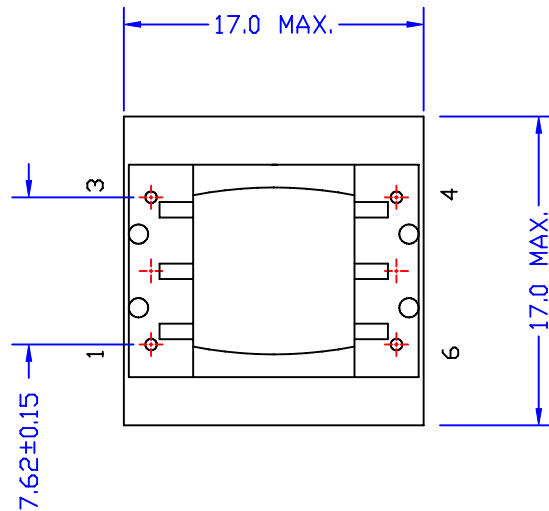


BLACK DOT PIN#1

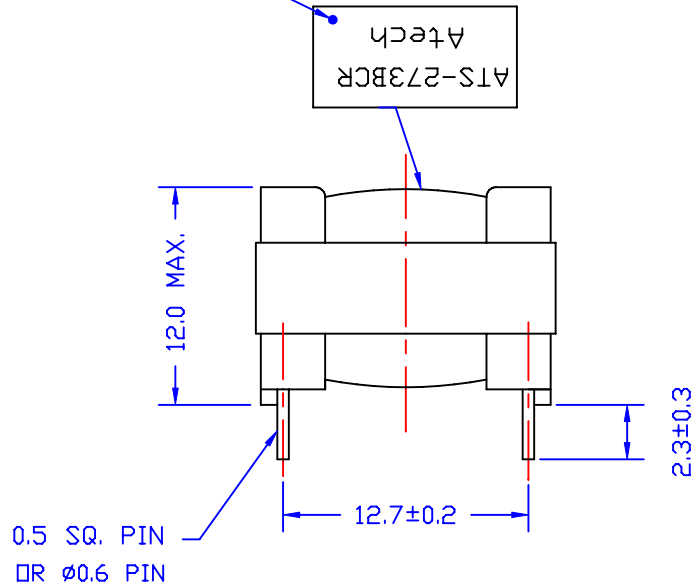

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 120 OHM $\pm$ 10%.
PIN 4-6 = 120 OHM $\pm$ 10%.
- INDUCTANCE (@200Hz, 1Vrms, PARALLEL) :
PIN 1-3 = 2.86 H MIN.
- RETURN LOSS (@-10 dBm, REF. 600 OHM) :
200Hz = 20 dB MIN.
3.5KHz = 20 dB MIN.
- INSERTION LOSS (@0 dBm, PIN 4-6 W/H 360 OHM) :
1KHz = 2.1 dB TYP.
- FREQ. RESPONSE (@REF. 1KHz) :
100Hz = $\pm$ 0.5 dB.
4KHz = $\pm$ 0.5 dB.
- TURN RATIO (@1KHz, 1Vrms) :
PIN 1-3:6-4 = 1 $\pm$ 1%.
- HI-POT (@1650VAC, 1mA, 2SEC) :
PIN 1-6
- RoHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:(02)2794-6667 FAX:(02)2794-8004		DWG. NO.
								ATS-273BCR
A	TURN RATIO	11/27/2006	PAIR		EUGENE	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE	09/06/2005	BART	LYS	SUEDY	M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						09/06/05	CTPH16001A	Pair