
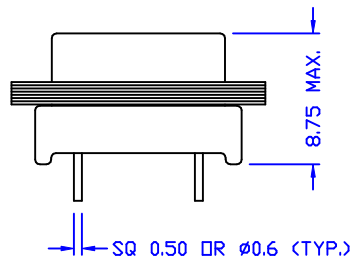

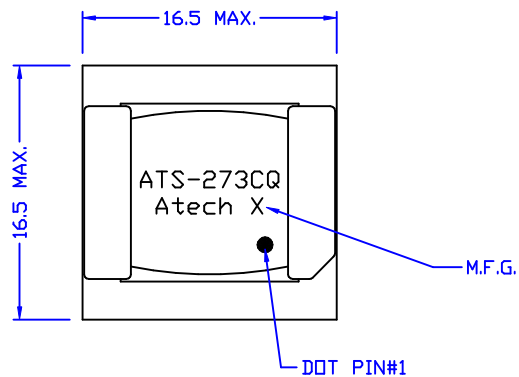


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 6-4 = 105 ΩHM ± 12%
PIN 3-1 = 128 ΩHM ± 12%
- INDUCTANCE PARREL (@250HZ, 1Vrms) :
PIN 1-3 = 11H MIN.
- RETURN LOSS (@REF. 600 ΩHM) : @200HZ = 30dB MIN.
@4KHZ = 30dB MIN.
- INSERTION LOSS (@1KHZ, 0dBm, 4-6 W/H 360 ΩHM, 1-3 W/H 12nF) :
PIN 1-3 = 3dB MAX.
- FREQ. RESPONSE (@REF. 1KHZ) : @200HZ = ± 0.3dB
@4KHZ = ± 0.3dB
- TURN RATIO (@9KHZ, 1Vrms) : PIN 1-3 : PIN 6-4 = 1 ± 1%
- HI-POT (@1250VAC, 1mA, 2SEC) : PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 600 : 360 TRANSFORMER	
								DWG. NO. ATS-273CQ	
	RELEASE	11/10/2004	BART	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 10F 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 11/10/04			
REVISIONS									DRAW <i>Pair</i>