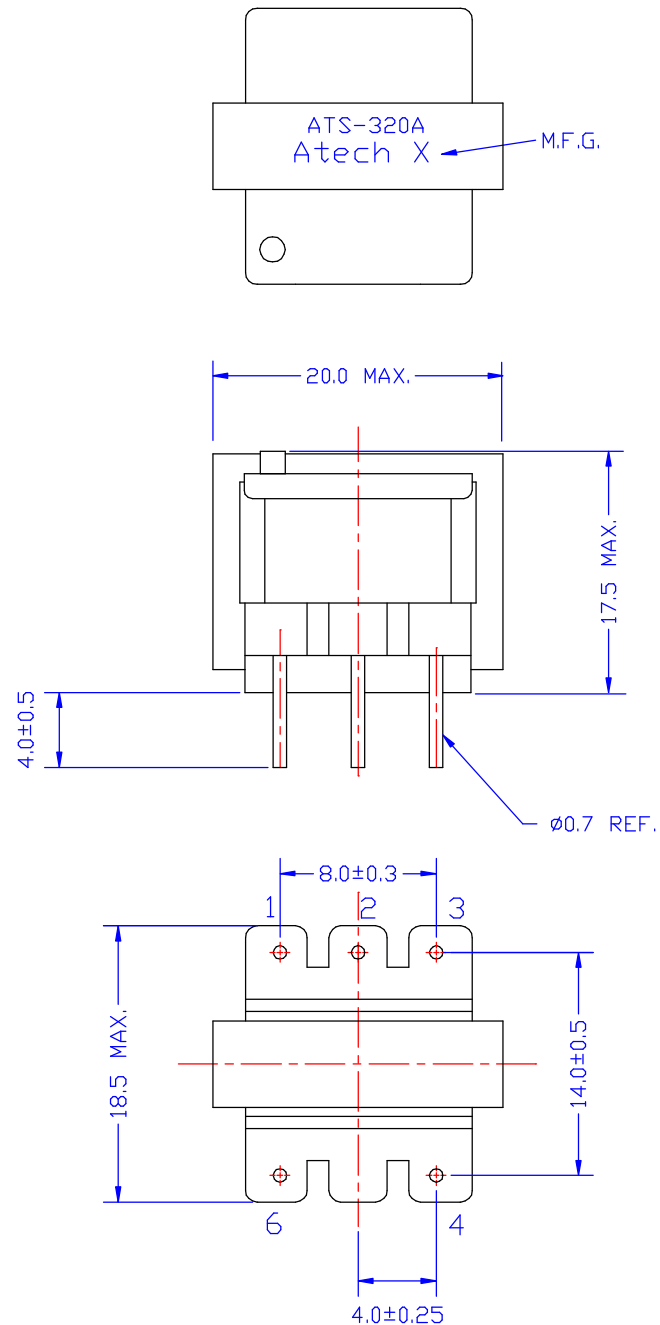


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 40 Ω MAX.
PIN 4-6 = 51 Ω MAX.
- INDUCTANCE (@1KHZ , 1Vrms) :
PIN 1-3 = 1.6 H MIN
- INSERTION LOSS (@1KHZ , Ω dBm , 4-6 W/H 600 Ω H)
PIN 1-3 = 0.9dB MAX.
- FREQ. RESP. (@REF. 1KHZ) : @300HZ = +/- 0.25dB
@4KHZ = +/- 0.15dB
- RETURN LOSS (@REF. 600 Ω H) : @300HZ = 15dB MIN.
@4KHZ = 15dB MIN.
- TURNS RATIO (@50KHZ , 1Vrms) 1-2 : 2-3 = 1 +/-1%
(@15KHZ , 1Vrms) 1-3 : 4-6 = 1 +/-1%
- HI-POT (@1250V , 1mA , 2SEC) : PRI-SEC

				Atech®		TITLE 600CT : 600 TRANSFORMER	
A SPEC. & DIM.				Atech Technology Co., Ltd.		DWG. NO. ATS-320A	
RELEASE				06/08/2004	BART AL SUE DY	UNITS: M/M	SAFETY
NO. DESCRIPTION				05/07/2004	PAIR AL SUE DY	DATE	SHEET 1 OF 1
REVISIONS				05/07/04		DRAW Pair	