
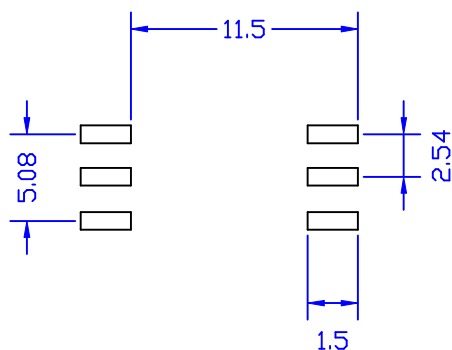
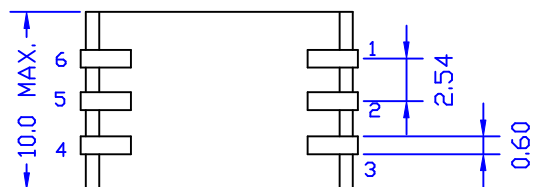
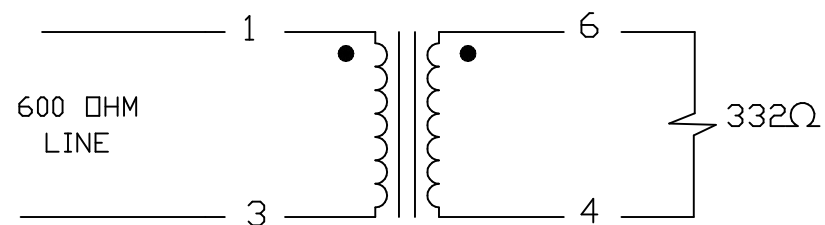


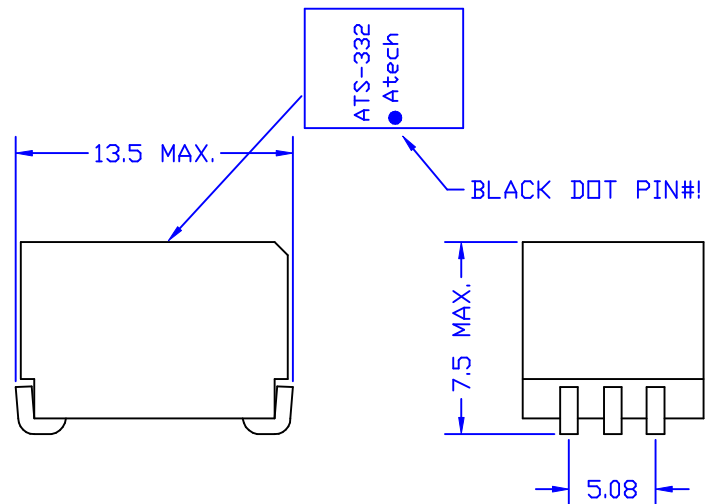

ELECTRICAL CHARACTERISTICS : (671-8275 COMPATIBLE)

1. DCR: 1-3 = 6-4 = 128 OHM +/- 10%
2. INDUCTANCE (@1KHZ, 0.1Vrms)
1-3 = 0.7H MIN.
3. INSERTION LOSS (@1KHZ, 0dBm) : 2.7dB TYP.
4. FREQ. RESPONSE (REF. 1KHZ)
@200HZ = +/- 1dB @4KHZ = +/- 1dB.
5. RETURN LOSS (REF. 600 OHM)
@200HZ = 14dB MIN. @4KHZ = 14dB MIN.
6. TURN RATIO (@16KHZ, 1Vrms) 1-3 : 6-4 = 1+/-1%
7. THD(@600HZ, -10dBm) = -74dB TYP.
8. HI-POT (@3750VAC, 1mA, 2SEC) PRI-SEC.
9. LEAD FREE

						Atech® Atech Technology Co., Ltd. TEL:(02)27946667 FAX:(02)27948004	TITLE 600 : 332 TRANSFORMER	
							DWG. NO. ATS-332N	
	RELEASE	03/16/2005	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 of 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						03/16/05		