
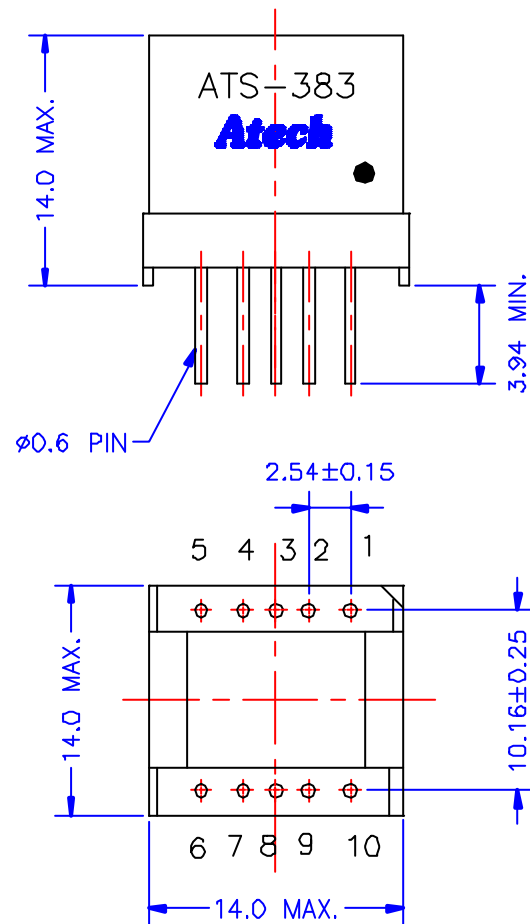


GRID
2.54 X 2.54

100 SPLIT : 324 CT

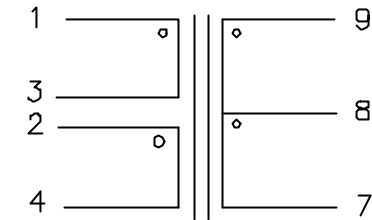

ELECTRICAL CHARACTERISTICE:

1. D.C.R. 1-3 = 2-4 = 2.04 OHM $\pm 10\%$ 9-7 = 7.4 OHM $\pm 10\%$
2. INDUCTANCE (@10KHZ, 0.1Vrms, 2-3 SHORT,)
1-4 = 3.96mH $\pm 5\%$
3. LEACKAGE INDUCTANCE (@100KHZ, 0.1Vrms, 2-3 & 7-9 SHORT)
1-4 = 18uH MAX.
4. Cw(@10KHZ, 1Vrms, 2-3 SHORT) 1-9 = 40pF MAX.
5. TURNS RATIO (@12KHZ, 1Vrms)
9-7 : 1-4 (2-3 SHORT) = 1.8 $\pm 1.5\%$
3-1 : 4-2 = 1 $\pm 1\%$
6. HI-POT (@1500VAC, 1mA, 2SEC) 1-9, 2-9

						Atech[®] Atech Technology Co., Ltd. TEL (02) 2794-6667 FAX (02) 2794-8004	TITLE TRANSFORMER	
							DWG. NO. ATS-383	
	RELEASE	05/21/99	PAIR		SLIEDY	UNITS M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 05/21/99		DRAW <i>Pair</i>
REVISIONS								