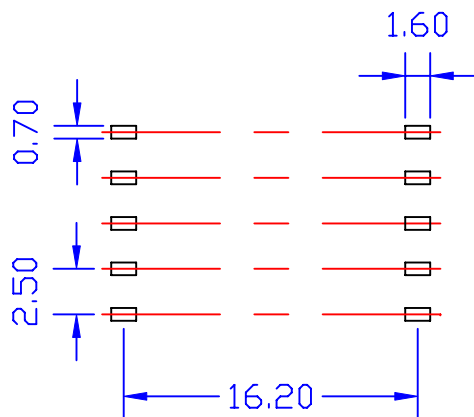
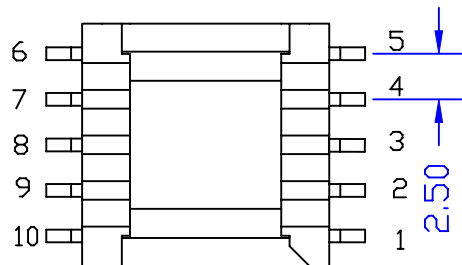

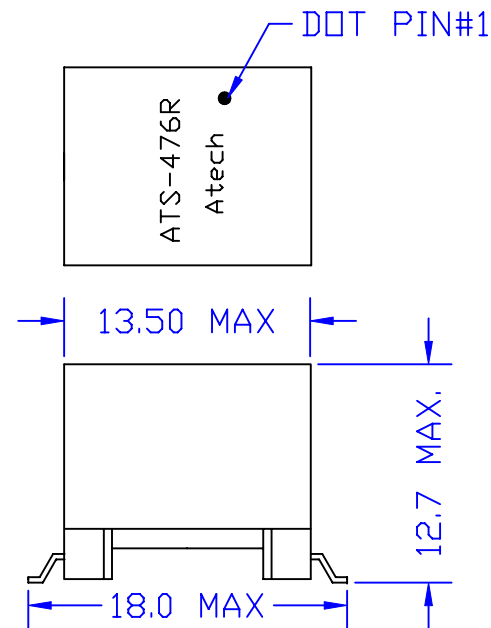


ELECTRICAL CHARACTERISTICS: (FOR C1626 COMPATIBLE)

1. D.C.R. : 1-4=2-5=1.1 OHM+/-10% 9-7=0.21 OHM+/-10%
2. INDUCTANCE : (@10KHZ, 0.1Vrms) 1-5(2-4 SHORT)=3mH+/-6%
3. LEAKAGE INDUCTANCE : (@100KHZ, 0.1Vrms) 1-5(2-4,7-9 SHORT) = 15uH MAX.
4. TURN RATIO : (@1MHZ, 1Vrms) 1-5(2-4 SHORT) : 9-7 = 5.4+/-1%
5. INSERTION LOSS : (@100KHZ, 0 dBm)=0.8 dB MAX
6. FREQ. RESP. : (@REF 100KHZ) @17KHZ=+/-0.5dB @600KHZ=+/-0.5dB
7. HI-POT (@ 2500 VAC, 0.5mA, 1SEC) 1-9,2-9.
8. Cw(@100KHZ, 0.1Vrms) 1-9(W/H 2-4 SHORT) = 60pF MAX.
9. RoHS COMPLIANCE.

C	CHANGE MARKING SIDE	07/03/2007	PAIR	VINCENT	EUGENE	Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE HD2L2 TRANSFORMER
B	MARKING ADD 'R'	06/26/2007	PAIR	VINCENT	EUGENE		DWG. NO.
A	PCB LAYOUT 1.6mm	06/15/2006	PAIR	AL	EUGENE		ATS-476R
	RELEASE	09/09/2005	BART	LYS	SUEDY	UNITS: M/M	SAFETY
ND	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTA41303AA
REVISIONS						09/09/05	SHEET 1 OF 1
							DRAW <i>Pair</i>