
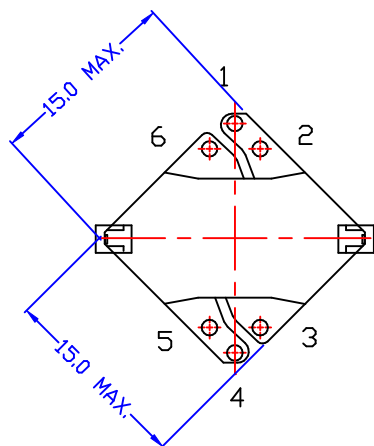


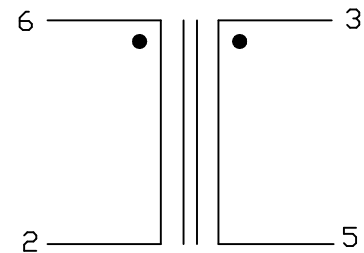

1. D.C.R. : PIN 6-2 = PIN 3-5 = 4.34 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 6-5 (2-3 SHORT) = 16mH $\pm$ 5%
(@100mA) : PIN 6-5 (2-3 SHORT) = 14.4mH MIN.
3. TURN RATIO (@127KHZ, 1Vrms) : PIN 6-2 : PIN 3-5 = 1 $\pm$ 1%
4. HI-POT (@500VAC, 1mA, 2SEC) : PRI.-SEC.

					 Atech® Atech Technology Co. Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE ADSL INDUCTOR		
B	W=20.0 MAX.	12/08 /2004	PAIR	AL		SUEDY	DWG. NO.	ATS-511
A	TURN RATIO	01/30 /2002	DOLLY	AL		SUEDY		
	RELEASE	03/26 /2001	PAIR			SUEDY		
NO	DESCRIPTION	DATE	BY	CHK		APPD		
REVISIONS						UNITS: M/M	SAFETY	SHEET 1 OF 1
						DATE 03/26/01		DRAW <i>Pair</i>