
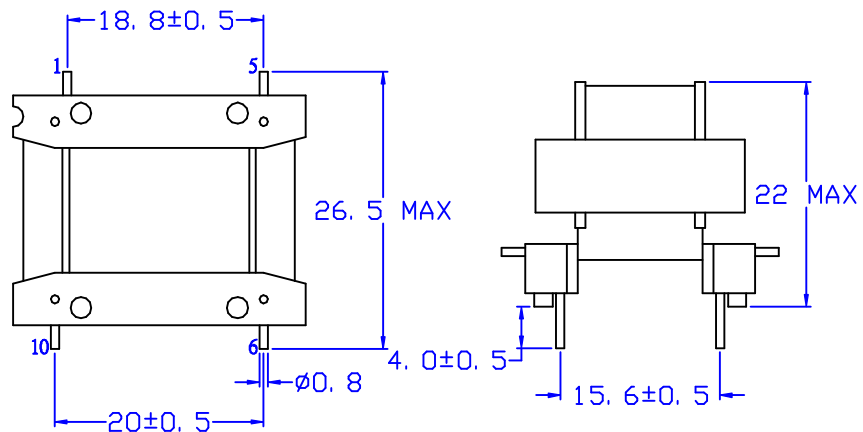


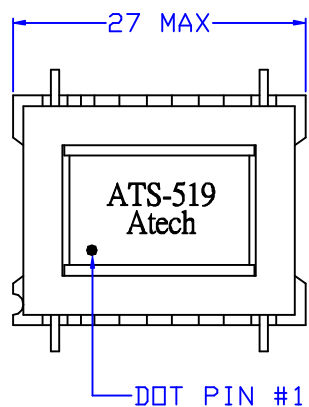

1. DCR : PIN 1-5 = 10^{-6} = 61 Ω HM MAX.
2. INDUCTANCE : (@1 KHZ, 1 Vrms) PIN 1-5 = 300 mH MIN.
3. INSERTION LOSS : (@1 KHZ, 0 dBm, 10^{-6} W/H 600 Ω HM) 1-5 = 1.8 dB MAX
4. FERQ. RESP : (@REF 1 KHZ) (@300 HZ) = ± 1.2 dB
 (@3500 HZ) = ± 1 dB
5. RETURN LOSS : (@REF 600 Ω HM) (@300 HZ) = 6 dB MIN.
 (@1 KHZ) = 13 dB MIN.
 (@3500 HZ) = 13 dB MIN.
6. HI - POT : (@1500 VAC, 1 mA, 2 SEC) PRI - SEC - CORE

						 Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE 600: 600 TRANSFORMER	
							DWG. NO. ATS-519	
	RELEASE	04/27/2001	DOLLY		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						04/27/01		<i>Pair</i>