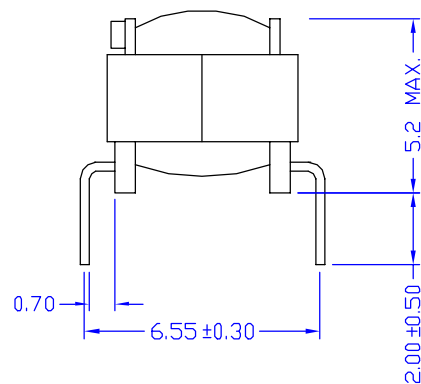
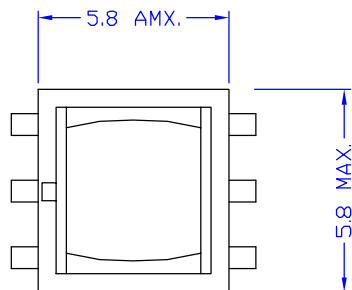


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-5 = 2-4 = 0.58 OHM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 0.1Vrms) : PIN 1-5 = 14.2uH $\pm$ 10%
(@200mA) = 10.22uH MIN.
3. TURN RATIO (@2.66MHZ, 1Vrms) : PIN 1-5 : PIN 2-4 = 1 $\pm$ 1%
4. HI-POT (@500VDC, 1mA, 2SEC) : PRI-SEC

						Atech® Atech Technology Co. Ltd. TEL: (82) 2794-6667 FAX: (82) 2794-8004		TITLE INDUCTOR
								DWG. NO. ATS-669
A	ERASE FRAME	10/25/2005	BART	MICHAEL	SUEDY	UNITS: M/M		SAFETY
	RELEASE	08/25/2003	RORY	KEVIN	SUEDY	DATE 08/25/03		
NO.	DESCRIPTION	DATE	BY	CHK	APPD			SHEET 1 OF 1
REVISIONS								DRAW Pair