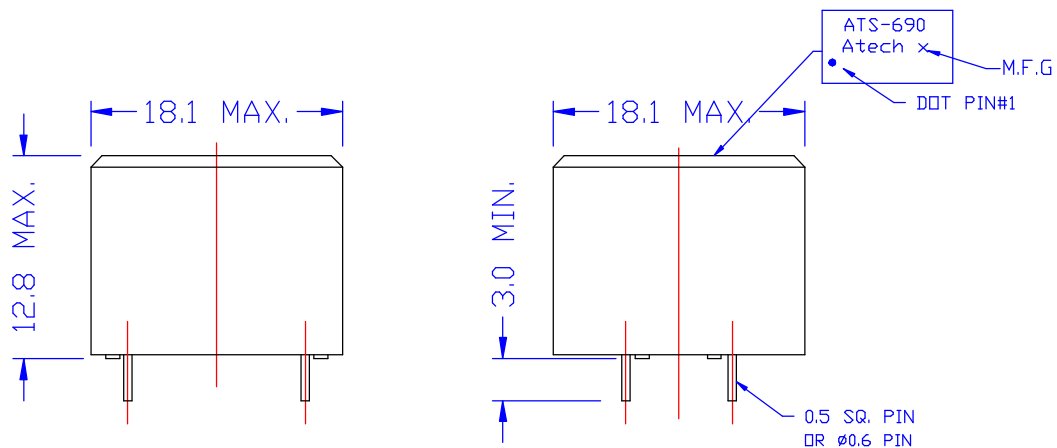


ELECTRICAL CHARACTERISTICS:

1. DCR : PIN 1-3 = 0.7 OHM MAX.
PIN 4-6 = 0.7 OHM MAX.
2. INDUCTANCE PARALLEL (@125KHZ , 1Vrms) :
PIN 1-3 = 1.2 mH $\pm$ 15%.
PIN 4-6 = 1.2 mH $\pm$ 15%.
3. LEAKAGE INDUCTANCE (@125KHZ , 1Vrms) :
PIN 1-3 (4-6 SHORT) = 46uH $\pm$ 10uH.
4. TURN RATIO (@230KHZ , 1Vrms) :
PIN 1-3:6-4 = 1 $\pm$ 1%.
5. HI-POT (@4KVrms, 1mA, 2S) : PIN 1-6.

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-690	
	RELEASE	01/30/2004	BART	YEN	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 01/30/04		DRAW <i>Pair</i>	
REVISIONS									