
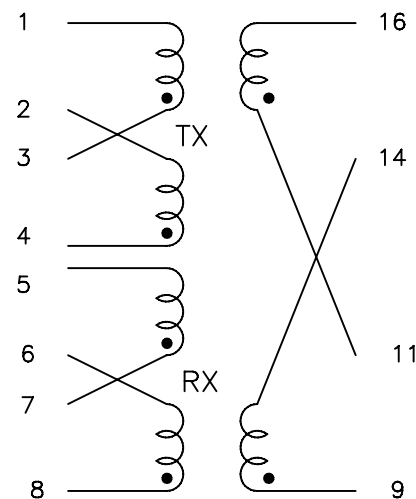
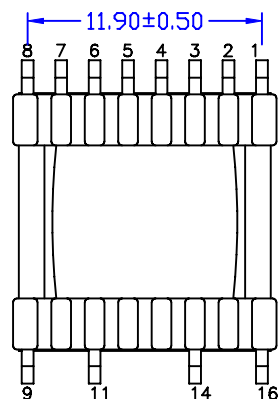




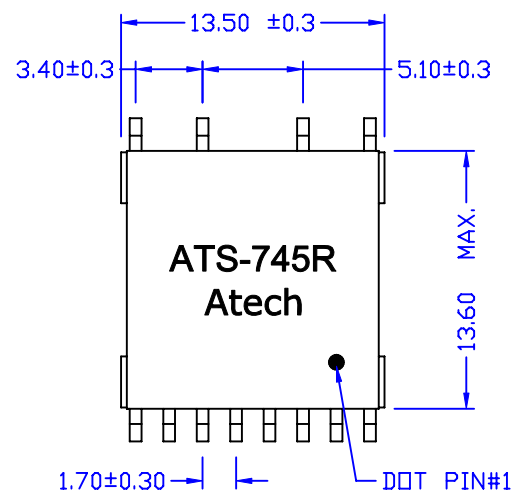

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 9-16 (11-14 SHORT) = 6.55 OHM MAX.
PIN 1-4 (2-3 SHORT) = 0.86 OHM MAX.
PIN 5-8 (6-7 SHORT) = 2.6 OHM MAX.
- INDUCTANCE (@10KHz, 50mVrms) :
PIN 16-9 (14-11 SHORT) = 1.4 mH ±10%.
- LEAKAGE INDUCTANCE (@100KHz, 50 mVrms, ALC OFF) :
PIN 16-9 (1-4, 2-3, 11-14 SHORT) = 15 uH MAX.
PIN 16-9 (5-8, 6-7, 11-14 SHORT) = 20 uH MAX.
- TURN RATIO (@150KHz, 0.1Vrms) :
PIN 16-9 (11-14 SHORT) : 1-4 (2-3 SHORT) = 4.4 ±1%.
PIN 16-9 (11-14 SHORT) : 5-8 (6-7 SHORT) = 2 ±1%.
- HI-POT (@1875VAC, 1mA, 2S) :
PIN 1-16 (2-3, 6-7, 11-14 SHORT)
- RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-745R	
	RELEASE	10/18/2005	BART	MICHAEL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						10/18/05			