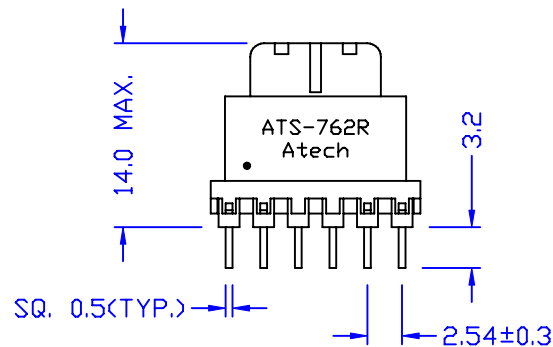
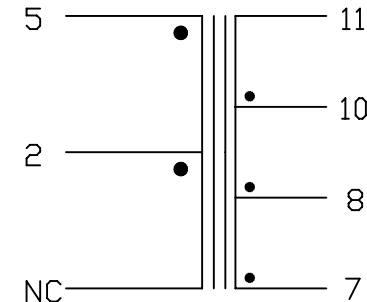

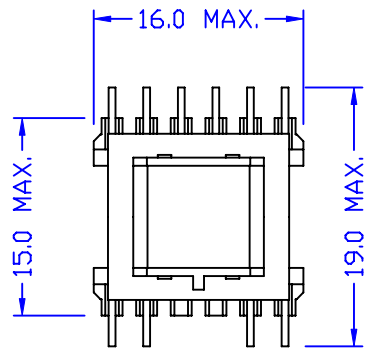


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 2-5 = 5 Ω HM MAX.
PIN 8-10 = 16 m Ω HM MAX.
PIN 10-11 = 16 m Ω H MAX.
PIN 7-8 = 28 m Ω HM MAX.
- INDUCTANCE (@10KHZ, 50mVrms) :
PIN 2-5 = 4.5 mH $\pm$ 5%.
- TURN RATIO (@30KHZ, 1Vrms) :
PIN 5-2:7-8 = 40 $\pm$ 5%.
PIN 5-2:8-10 = 60 $\pm$ 5%.
PIN 5-2:10-11 = 40 $\pm$ 5%.
- HI-POT :
(@3KVAC, 5mA, 1MIN.) : PRI-SEC
(@0.5KVAC, 5mA, 1MIN.) : PRI-CORE

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE $\pm$ 0.3

B	EPDXY	07/19/2006	PAIR	MICHAEL	EUGENE	Atech® Atech Technology Co. Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE TRANSFORMER	
	RENAME	06/08/2006	PAIR	AL	EUGENE		DWG. NO. ATS-762R	
RELEASE		05/26/2006	PAIR	VINCENT	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE 05/26/06	P/N: CTW013003A	DRAW Pair
REVISIONS								