

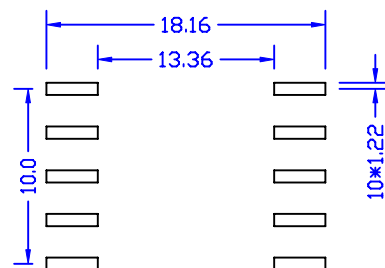
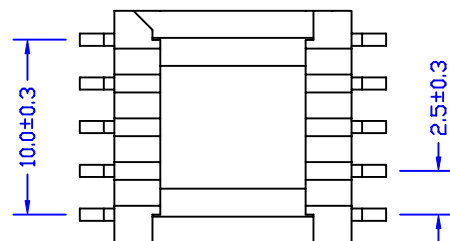



DOT PIN#1

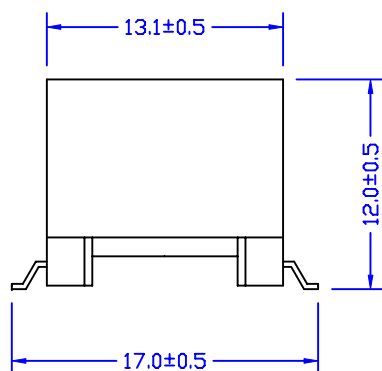

PCB LAYOUT

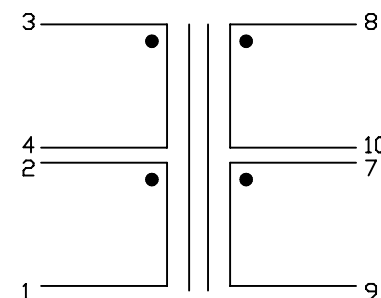

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 130m OHM MAX.
PIN 3-4 = 500m OHM MAX.
PIN 7-9 (7-8,9-10 SHORT) = 55m OHM MAX.
- INDUCTANCE (@1KHZ, 0.1Vrms) : PIN 3-4 = 127uH $\pm 10\%$
- LEAKAGE INDUCTANCE (@200KHZ, 0.1Vrms)
PIN 3-4 (1-2,7-8-9-10 SHORT) = 10uH MAX.
- TURN RATIO (@1MHZ, 0.1Vrms) : PIN 3-4 : 8-10 = 3.43 $\pm 7\%$ (7-8,9-10 SHORT)
PIN 3-4 : 2-1 = 4.8 $\pm 4\%$
- HI-POT (@1.5KVAC, 1mA, 2SEC) : PIN 3-8
(@500VAC, 1mA, 2SEC) PIN 3-1
- RoHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL:02)2794-6667 FAX:02)2794-8004		DWG. NO.
						UNITS:		ATS-811R
						M/M		SHEET 1 OF 1
						DATE		DRAW
REVISIONS						06/07/06		Pair