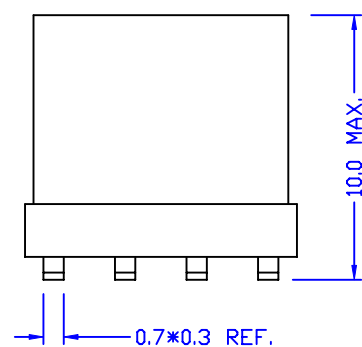
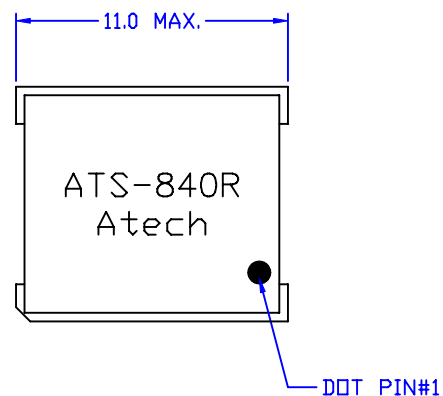


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 2-4 = 0.65 OHM MAX.
PIN 7-6 = 8-5 = 0.5 OHM MAX.
- INDUCTANCE (@10KHz,0.1Vrms) :
PIN 1-4 (2-3 SHORT) = 420uH ±10%.
- LEAKAGE INDUCTANCE (@1MHZ,0.1Vrms) :
PIN 1-4 (2-3,5-6-7-8 SHORT) = 1.5uH MAX.
- INTERWINDING CAP (@0.1Vrms, 100KHz) :
PIN 1-2-3-4 TO 5-6-7-8 = 70pF MAX.
- TURN RATIO (@0.1Vrms, 500KHz) :
PIN 1-4:8-6 (2-3,5-7 SHORT)= 2 ±1%.
- T.H.D.(@30KHZ,2.75Vp-p) = 74dB MIN.
- LONGITUDINAL BAL.(@3MHZ) = 44dB MIN.
- HI-POT (@1500VAC, 1mA, 1MIN.) : PRI-SEC
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE TRANSFORMER
								DWG. NO. ATS-840R
	RELEASE	02/13/2007	PAIR	MICHAEL	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						02/13/07		