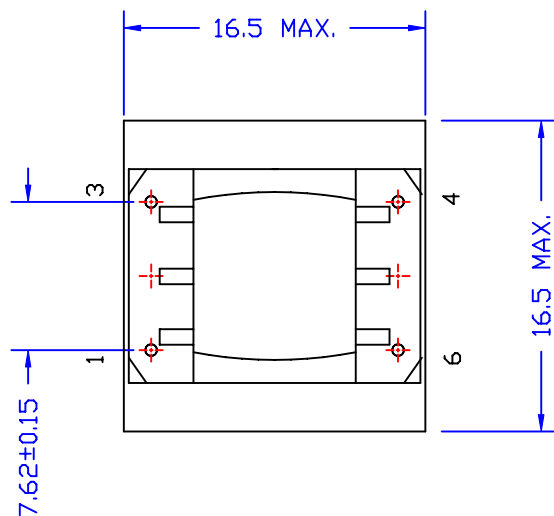
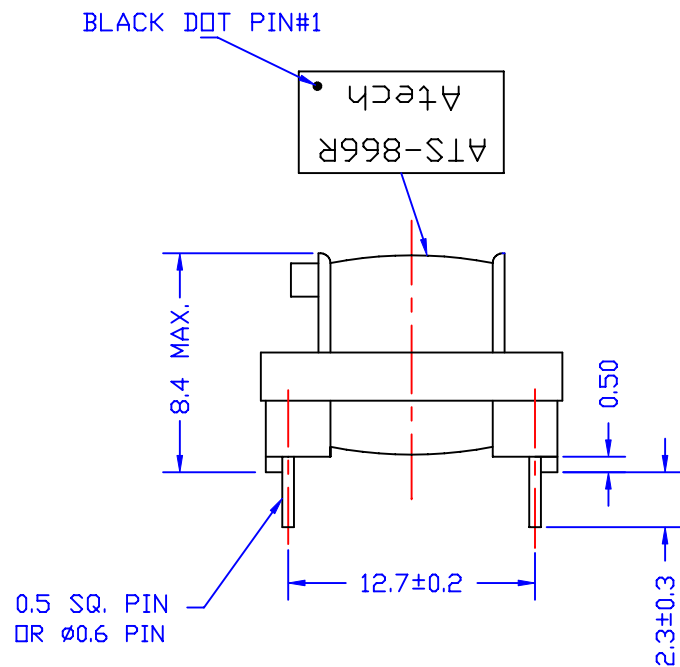


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 82 OHM±12%
PIN 6-4 = 106 OHM ±12%
2. RETURN LOSS : (REF. 600 OHM) 600 TO 4KHZ = 20dB MIN.
3. INSERTION LOSS : (@600HZ, 0dBm) PIN 1-3 = 1.9dB MAX.
4. T.H.D : 600HZ = -85dB MAX.
5. TURN RATIO : (11KHZ, 1Vrms) PIN 3-1 : 6-4 = 1 ±1%
6. HI-POT : (@1500V, 1mA, 2SEC) PRI-SEC
7. RoHS COMPLIANT

						Atech[®] Atech Technology Co.. Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 600 : 374 TRANSFORMER	
								DWG. NO. ATS-866R	
	RELEASE	08/08/2007	DOLLY	WILLIE	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						08/08/07			