
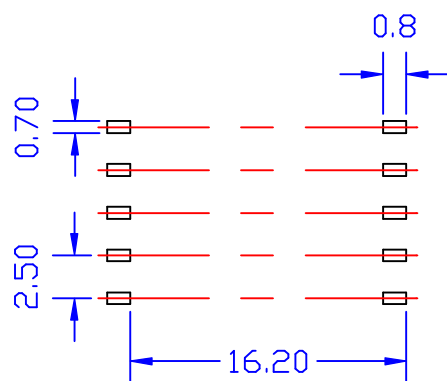
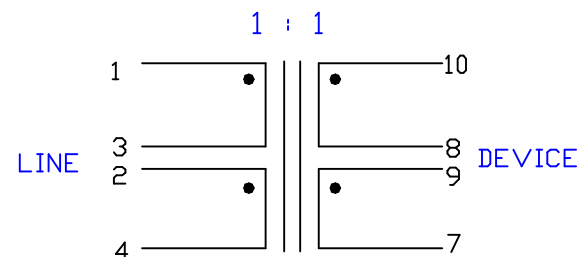
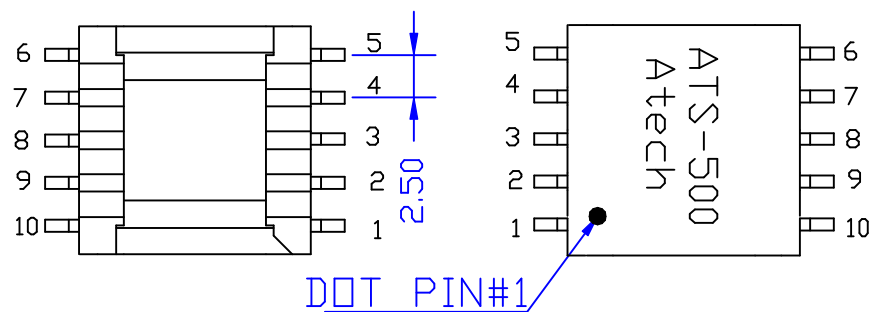


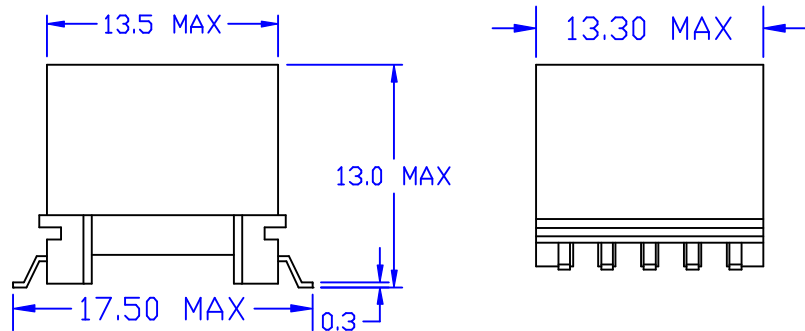

ELECTRICAL CHARACTERISTICS: (FOR B2251 COMPATIBLE)

1. D.C.R. : 1-3 = 1.21 Ω HM $\pm$ 12%, 10-8 = 9-7 = 1.35 Ω HM $\pm$ 12%
2-4 = 1.53 Ω HM $\pm$ 12%
2. INDUCTANCE : (<@10KHZ, 0.1Vrms, W/H 3-2 SHORT) 1-4 = 2.6mH $\pm$ 12%
3. LEAKGE INDOCTANCE : (<@100KHZ, 0.1Vrms.W/H 3-2, 10-7, 8-9, SHORT)
1-4 = 5uH MAX.
4. INTERWINDING CAP. (<@10KHZ, 0.1Vrms, W/H 2-3,8-9 SHORT) 1-10 = 30pF TYP.
5. TURN RATIO : (<@15KHZ, 1Vrms, W/H 3-2 , 8-9 , SHORT) 1-4 : 10-7 = 1 $\pm$ 1%
6. HI-POT (@ 1650 VAC, 1mA, 2SEC) PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE ADSL TRANSFORMER	
							DWG. NO. ATS-500	
	RELEASE	02/02/01	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						02/02/01		<i>Pair</i>