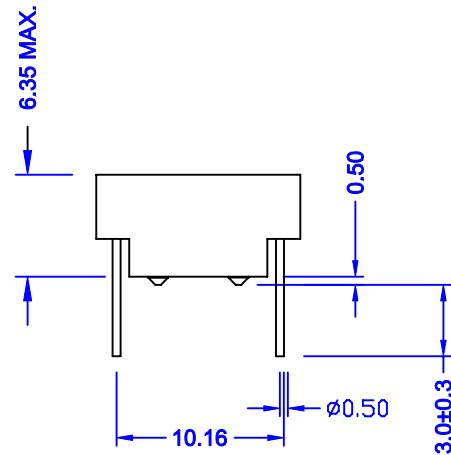
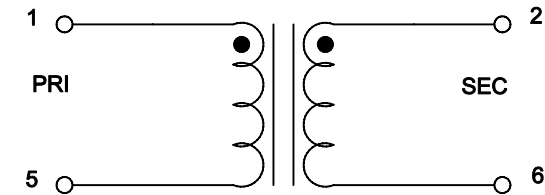




ELECTRICAL CHARACTERISTICS (@25°C) :

1. TURNS RATIO ($\pm 2\%$) : PIN 1-5:2-6 = 1:1
2. PRI. OCL (100KHZ/50mV) : 40 uH MIN.
3. CW/W : 5 pF MAX.
4. L.L (100KHZ/50mV) : 0.1 uH MAX.
5. HI-POT : 3000 Vrms.
6. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE T3/DS3/E3/STS-1 TRANSFORMER	
							DWG. NO. PT51186L	
	RELEASE	12/28/2006	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						12/28/06		