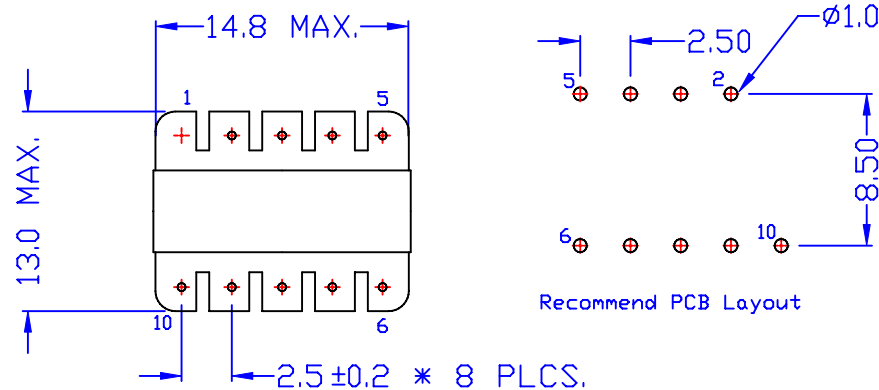
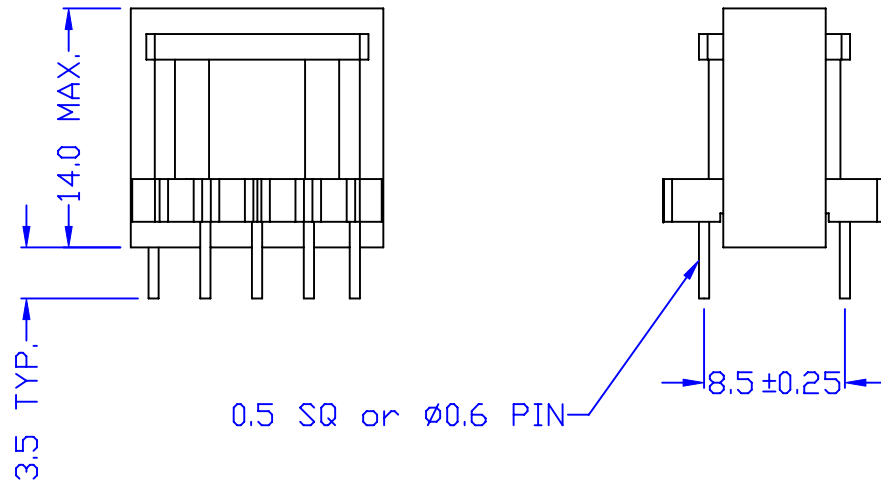



ELECTRICAL CHARACTERISTICS:

1. DCL (@100KHZ, 0.1Vrms W/H 0.0ADC) : PIN 2-4 = 783.6-957.8uH
(@100KHZ, 0.1Vrms W/H 0.35ADC) : PIN 2-4 = 705.3uH MIN.
2. DCR (@20DEGREES C) : PIN 2-4 = 3.7 OHM MAX. PIN 7-9 = 168.2 mOHM MAX.
3. TURN RATIO : PIN 2-4 : 7-9 = 1 : 0.105
4. HI-POT (@3000VDC, 1mA, 1 SEC) : PIN 2-7
(@1500VDC, 1mA, 1 SEC) : PIN 2-CORE, PIN 7-CORE
5. RoHS COMPLIANT

						Bourns Inductive Solution		TITLE FLYBACK TRANSFORMER	
								DWG. NO. PT51247L	
	RELEASE	03/06/2008	Pair	Michael	Eugene	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:		DRAW <i>Pair</i>
REVISIONS						03/06/08			