
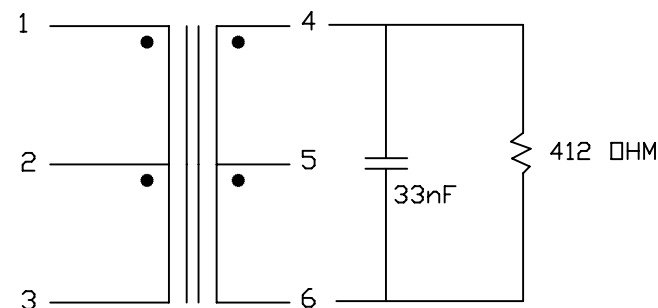
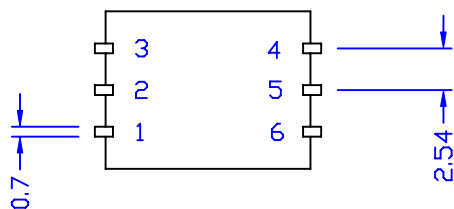





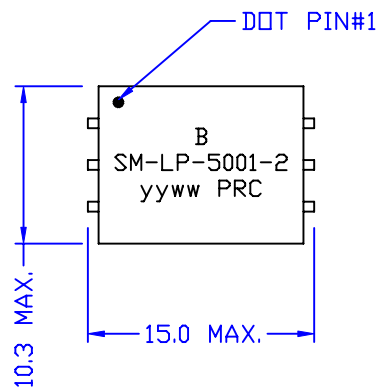

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 115 OHM $\pm$ 15%.
PIN 4-6 = 115 OHM $\pm$ 15%.
- INDUCTANCE PARALLEL (@200HZ, 0.78 Vrms) :
PIN 1-3 = 3.8 H MIN.
- LEAKAGE INDUCTANCE (@1KHZ, 0.1Vrms) :
PIN 1-3 (4-6 SHORT) = 5.5mH TYP.
- INSERTION LOSS (@2KHZ, 0dBm) :
PIN 1-3 (4-6 W/H 600 OHM) = 2 dB MAX.
- FREQ. RESP (@REF 2KHZ) :
FROM 200HZ~4KHZ = $\pm$ 0.25 dB.
- RETURN LOSS : (4-6 W/H 412 OHM/33nF)
FROM 200HZ~4KHZ = 24 dB MIN.
- TRUN RATIO (@15KHZ, 1Vrms) :
PIN 1-3 : 4-6 = 1 $\pm$ 1%.
- HI-POT (@4.6KVAC, 1mA, 1MIN) : PRI-SEC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE $\pm$ 0.25

C	INSERTION LOSS 600 OHM	07/26/2007	PAIR	VENCENT	EUGENE	Atech® Atech Technology Co. Ltd. TEL:022794-6667 FAX:022794-8004	TITLE	TRANSFORMER
B	RETURN LOSS	03/05/2007	PAIR	VENCENT	EUGENE		DWG. NO.	SM-LP-5001-2E
A	CHANGE CAN	01/18/2007	PAIR	VENCENT	EUGENE			
	RELEASE	05/18/2005	BART	ANDY	SUEDY	UNITS:		
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M	SAFETY	SHEET 1 OF 1
REVISIONS						DATE	P/N:	DRAW
						05/18/05	CTPL08002A	Pair