

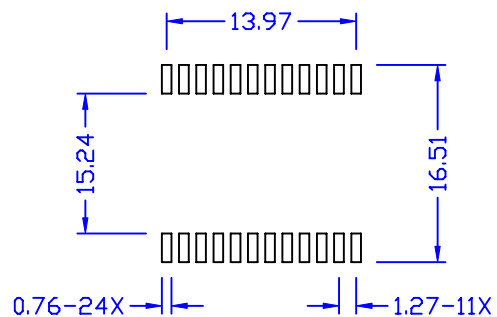


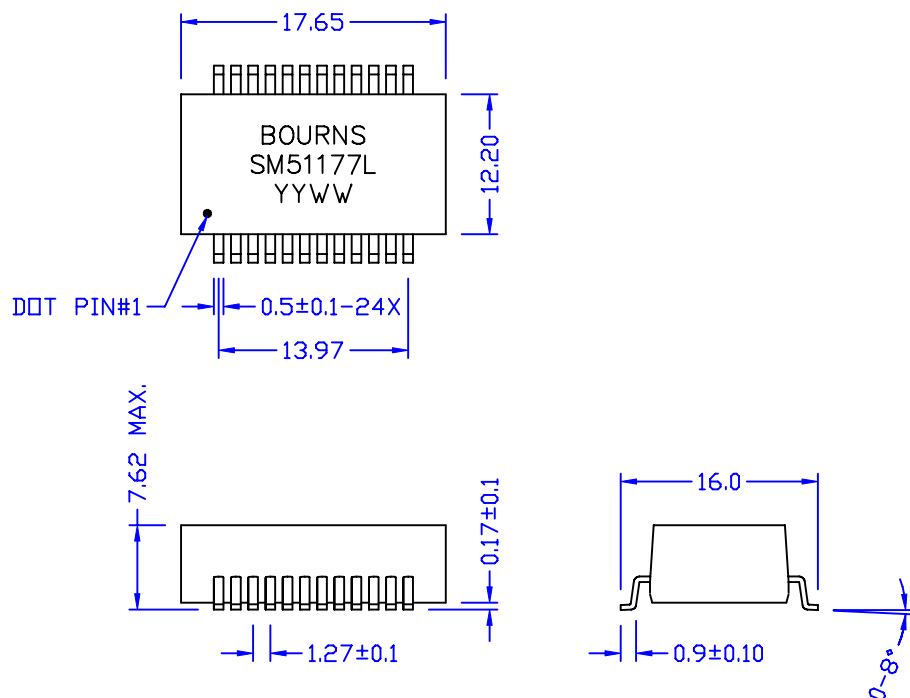

PCB SUGGEST PAD LAYOUT

TOLERANCE : ± 0.25

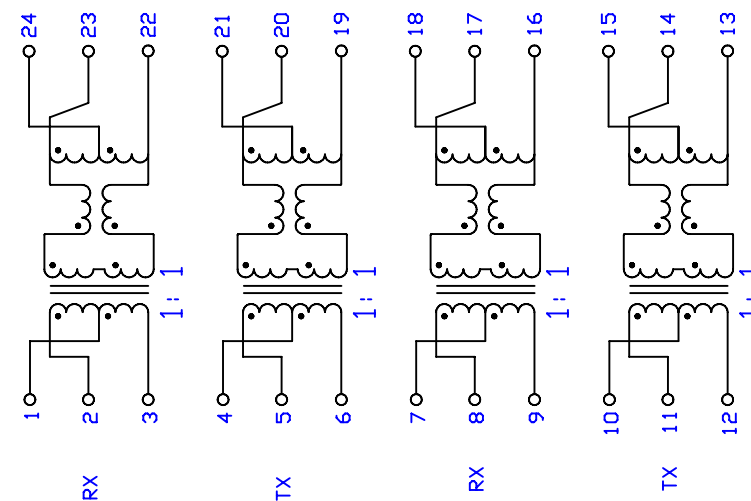

ELECTRICAL CHARACTERISTICS : (H5007 COMPATIBLE)

1. TURN RATIO(±3%) :TX = 1CT : 2CT RX = 1CT : 1CT
2. SEC $\square$ CL(@100KHZ/0.1V TX & RX) = 1.2mH MIN.
3. PRI./SEC. CW/W: 35pF MAX.
4. PRI-SEC LK = 0.5 μ H MAX.
5. DCR PRI = 0.8 OHM MAX.
6. PRIMARY PINS : TX= 4-6&10-12 RX= 24-22&18-16
7. HI-POT : 1500V. PRI-SEC, 1S
8. REEL PACKING
8. RoHS Compliant

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE T1/E1/ISDN TRANSFORMER	
								DWG. NO. SM51177EL	
	RELEASE	06/23/06	PAIR	AL	EUGENE	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						06/23/06		DRAW <i>Pair</i>	