


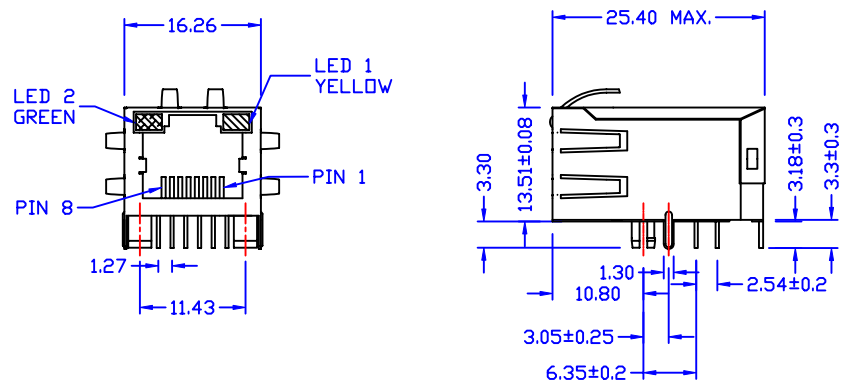

1. OCL (@100KHZ/0.1Vrms 8mA DC/BIAS) : 350 uH MIN.
2. DCR : P1-P3, J1-J2, J3-J6 = 1.0 OHM MAX.  
P4-P6 = 1.2 OHM MAX.
3. HI-POT : 1500 Vrms.
4. INSERTION LOSS : 0.1~100MHZ = -1.0 dB MAX.
5. RETURN LOSS : 1~30MHZ = -20 dB MIN.  
30~60MHZ = -15 dB MIN.  
60~80MHZ = -10 dB MIN.
6. CROSS TALK : 1~100MHZ = -30 dB MIN.
7. TURNS RATIO : 1CT:1CT ±3%.
8. CMRR : 1~100MHZ = -30 dB MIN.

|           |             |            |      |     |       |                                                                                                                                                                                       |                     |                     |
|-----------|-------------|------------|------|-----|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------------------|
|           |             |            |      |     |       | <br><b>Atech</b> <sup>®</sup><br>Atech Technology Co., Ltd.<br>TEL:02-2794-6667 FAX:02-2794-8004 | TITLE<br>LAN-MATE   |                     |
|           |             |            |      |     |       |                                                                                                                                                                                       | DWG. NO.<br>ATM-100 |                     |
|           | RELEASE     | 04/11/2005 | BART | AL  | SUEDY | UNITS:<br>M/M                                                                                                                                                                         | SAFETY              | SHEET 10F 1         |
| NO.       | DESCRIPTION | DATE       | BY   | CHK | APPD  | DATE                                                                                                                                                                                  |                     | DRAW<br><i>Pair</i> |
| REVISIONS |             |            |      |     |       | 04/11/05                                                                                                                                                                              |                     |                     |