
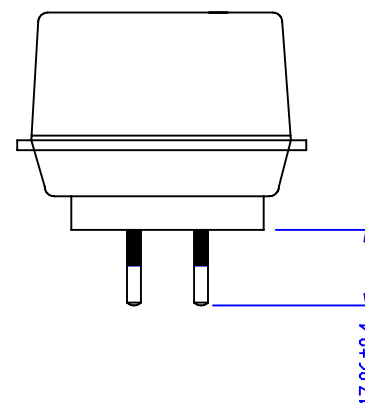
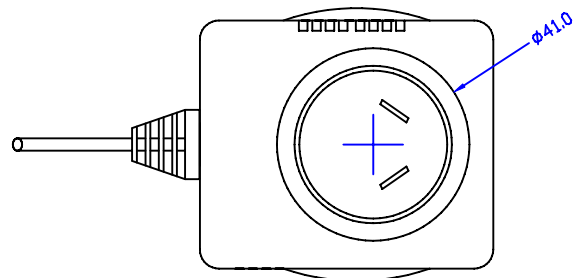
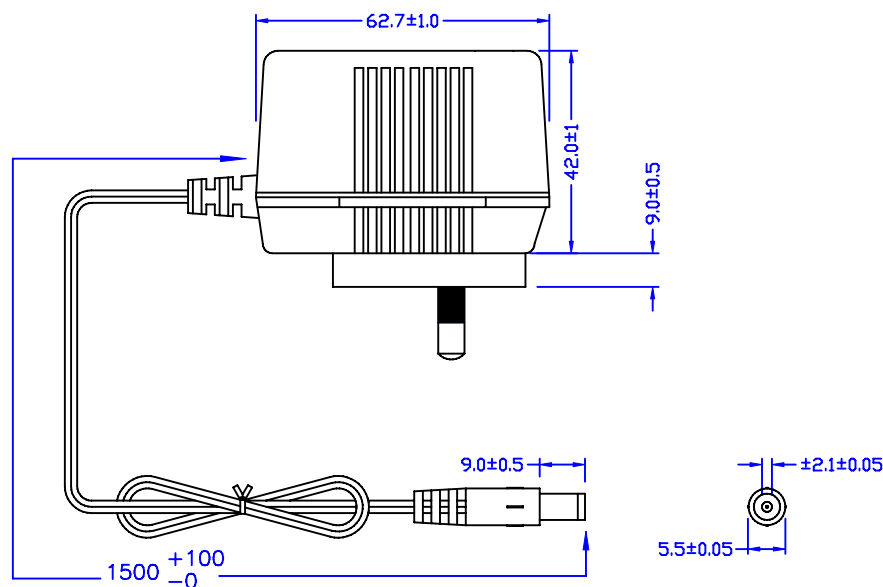


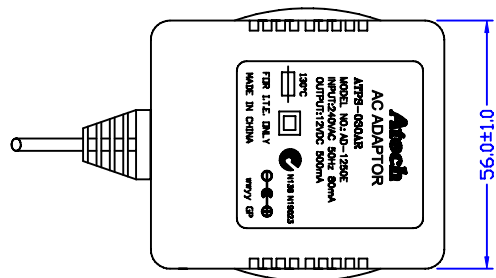

#### ELECTRICAL CHARACTERISTICS :

1. Input Rated Voltage and Frequency : 240 VAC 50Hz
2. Output Voltage and Current :  
 Input Volt.      Output Volt.      Rate Current      No Load Volt.  
 240VAC 50Hz      DC 12.5V Min.      DC 0.5A      DC 19.9V±5%
3. Exciting Current (I<sub>Co</sub>) : 50mA (rms) max, at Nom. Voltage input 240V 50Hz
4. Input Core Loss :  
 AC Nom. Voltage input 240V 50Hz 1.8 W max.
5. Efficiency :  
 Efficiency 40% min, at input 240 V 50 Hz, Maximum load.  
 PS : Efficiency = (W<sub>out</sub>/W<sub>in</sub>)\*100%.
6. RoHS compliance.

|           |             |            |      |        |        |                                                                                               |  |                          |  |
|-----------|-------------|------------|------|--------|--------|-----------------------------------------------------------------------------------------------|--|--------------------------|--|
|           |             |            |      |        |        | <div><b>Atech®</b><br/>Atech Technology Co., Ltd.<br/>TEL:02)2794-6667 FAX:02)2794-8004</div> |  | TITLE<br>AC/DC ADAPTOR   |  |
|           |             |            |      |        |        |                                                                                               |  | DWG. NO.<br>ATPS-030AR-1 |  |
|           |             |            |      |        |        |                                                                                               |  |                          |  |
|           | RELEASE     | 11/27/2007 | PAIR | Willie | EUGENE | UNITS:<br>M/M                                                                                 |  | SAFETY                   |  |
| NO.       | DESCRIPTION | DATE       | BY   | CHK    | APPD   | DATE<br>11/27/07                                                                              |  | SHEET 1 OF 1             |  |
| REVISIONS |             |            |      |        |        |                                                                                               |  | DRAW<br><i>Pair</i>      |  |