
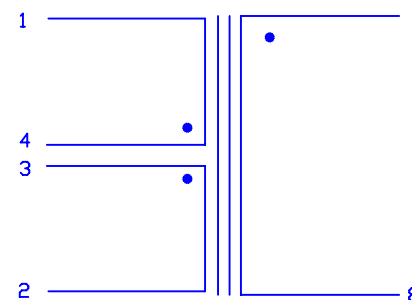
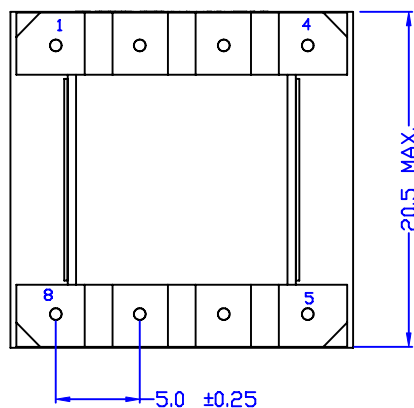
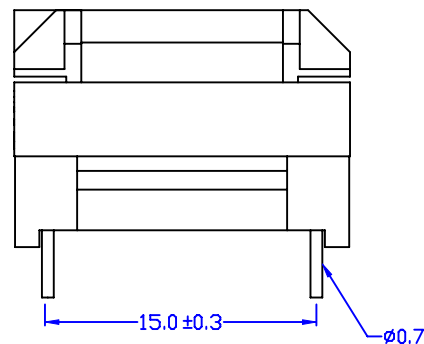
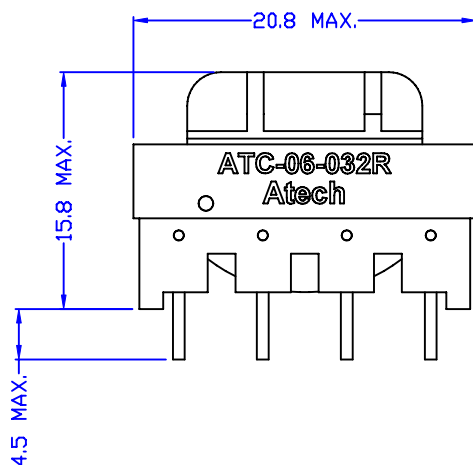


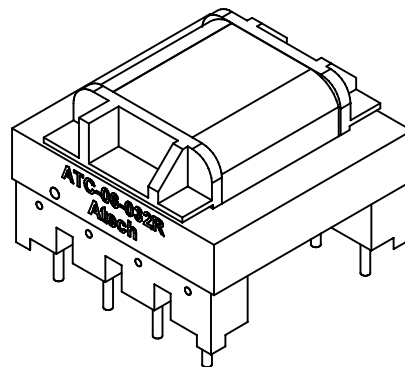

ELECTRICAL CHARACTERISTICS:

1. D.C.R : 1-4 = 1.3 Ω HM MAX.
3-2 = 0.46 Ω HM MAX.
5-8 = 0.17 Ω HM MAX.
2. INDUCTANCE (@10KHZ,0.1Vrms) : 1-4 = 1.26mH $\pm$ 5%
3. LEAKAGE INDUCTANCE(@100KHZ,0.1Vrms) :
1-4(2-3,5-8 SHORT) = 40uH MAX.
4. TURN RATIO (@10KHZ,0.1Vrms): 4-1 : 3-2 = 5 $\pm$ 1%
4-1 : 5-8 = 5.25 $\pm$ 1%
5. HI-POT(@1875 VAC,1mA,2SEC): 1-2 , 1-8
6. RoHS COMPLIANT

						Atech® Atech Technology Co. Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE TRANSFORMER	
A	SPEC.	01/05/2006	PAIR	MICHAEL	EUGENE		DWG. NO. ATC-06-032R	
	RELEASE	10/20/2006	PAIR	MICHAEL	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW Pair
REVISIONS						10/20/06		