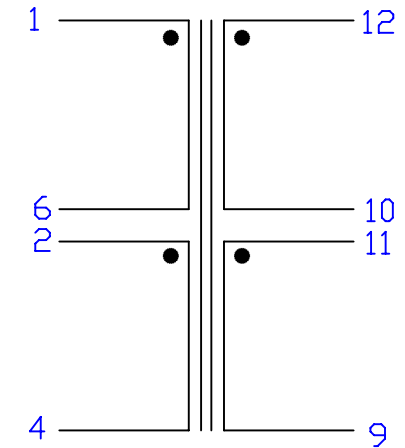
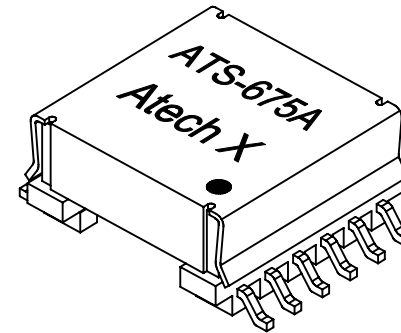
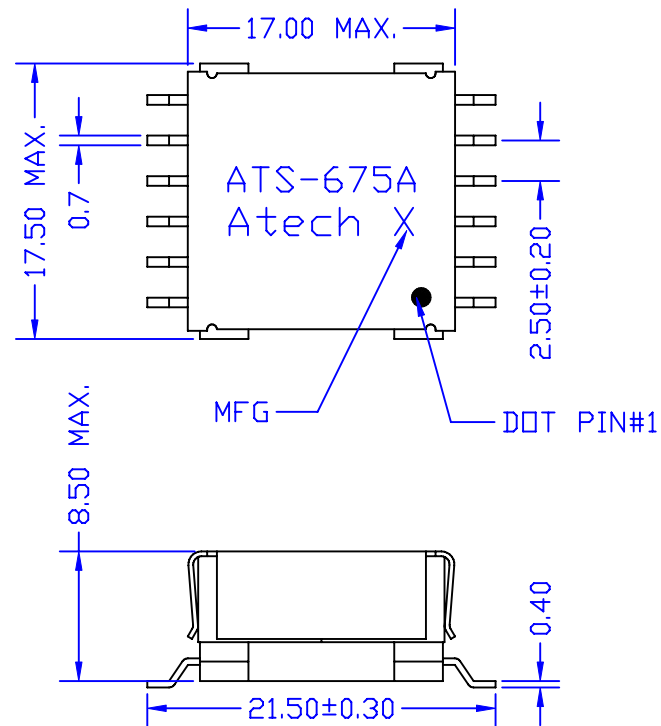


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 2-4 = 0.22 OHM MAX., PIN 1-6 = 0.07 OHM MAX.
PIN 12-10 = 11-9 = 0.07 OHM MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) : PIN 2-4 = 95uH $\pm$ 5%
(1ADC) : PIN 2-4 = 85uH MIN.
- TURN RATIO (@4KHz, 0.1Vrms) : PIN 2-4 : 1-6 = 3.4 $\pm$ 1%
PIN 2-4 : 12-10 = 3.4 $\pm$ 1%
PIN 2-4 : 11-9 = 3.4 $\pm$ 1%
- HI-POT (@500VAC, 1mA, 1SEC) : PIN 1-2
(PIN 10-11 SHORT) : PIN 2-12
- RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE DC/DC TRANSFORMER	
								DWG. NO. ATS-675AR	
	RELEASE	09/15 /2005	BART	LYS	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTW115002A		
REVISIONS						09/15/05	DRAW <i>Pair</i>		