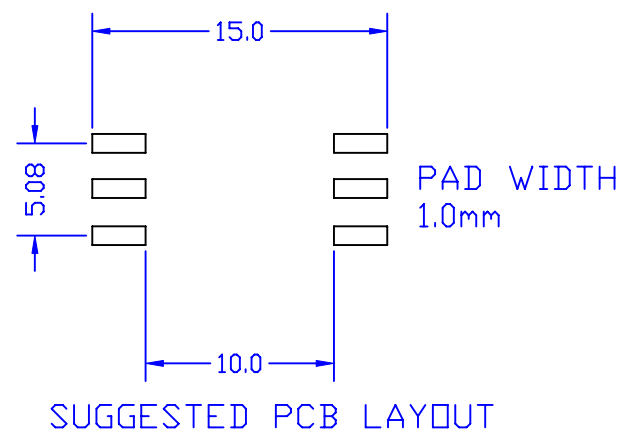
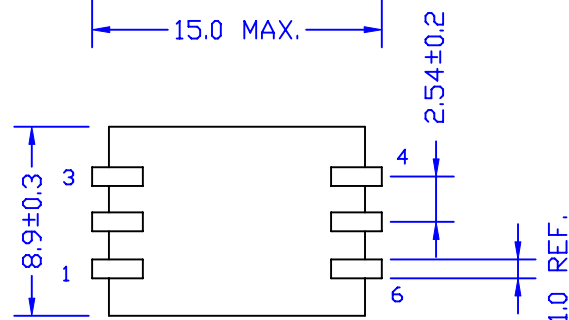
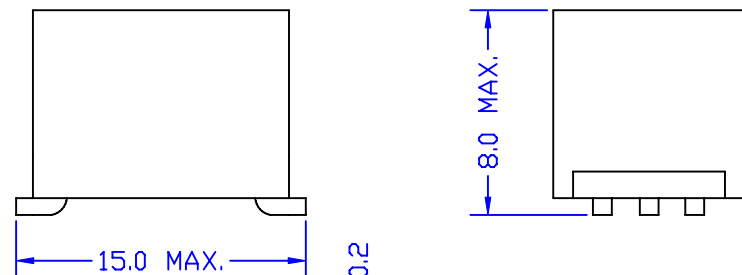
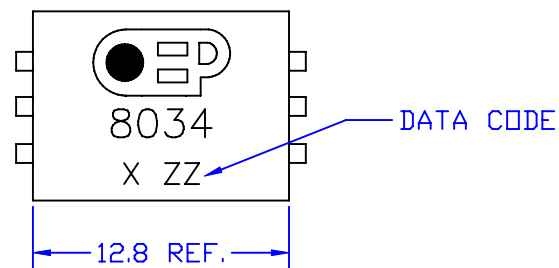


ELECTRICAL CHARACTERISTICS :

- DCR: PIN 1-3 = 6-4 = 111.4 Ω HM $\pm$ 15%
- INDUCTANCE (@100HZ, 0.27Vrms):
PIN 1-3 = 3.6 H MIN.
PIN 6-4 = 3.6 H MIN.
- LEAKAGE INDUCTANCE (@1KHz, 0.27Vrms) :
PIN 1-3 (6-4 SHORT) = 4.1 mH TYP.
PIN 6-4 (1-3 SHORT) = 4.1 mH TYP.
- TURN RATIO (@15KHz, 0.27Vrms) :
PIN 1-3:6-4 = 1 $\pm$ 1%.
- HI-POT (@3KVAC, 1mA, 2 SEC) :
PRI-SEC
- RoHS COMPLIANCE.

NOTE : DO NOT PASS DC CURRENT THROUGH WINDINGS.

C	CHANGE CAN	06/20/2007	PAIR	VINCENT	EUGENE	Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE	TRANSFORMER
B	LEAKAGE	10/23/2006	PAIR	VINCENT	EUGENE		DWG. NO.	OEP8034R
A	DIM.	12/08/2005	BART	MICHAEL	SUEDY			
	RELEASE	12/05/2005	BART	VICENT	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
ND	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						12/05/05		