
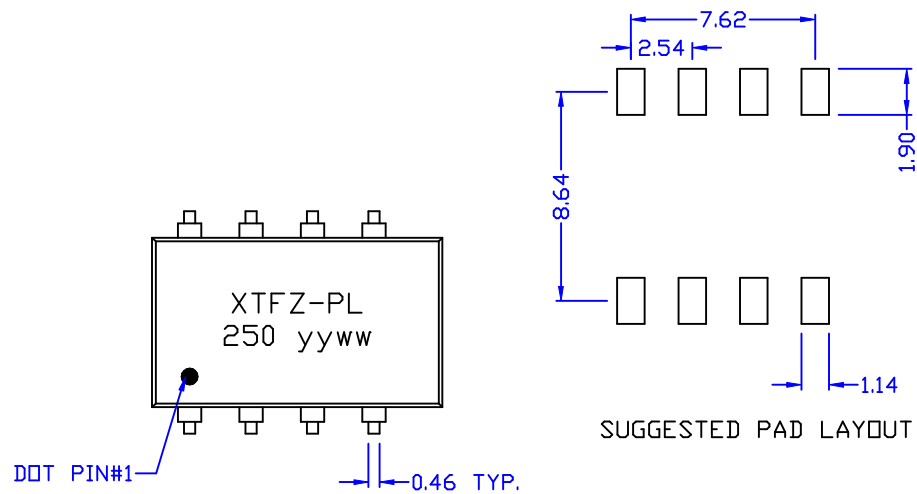


ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : 1:1
2. PRIMARY INDUCTANCE OCL : 33 μ H MIN.
3. DCR : 0.3 OHM MAX.
4. COMMON MODE ATTENUATION :
 - 100 KHZ = 9 dB TYP.
 - 1 MHZ = 13 dB TYP.
 - 10 MHZ = 32 dB TYP.
 - 30 MHZ = 32 dB TYP.
 - 50 MHZ = 30 dB TYP.
 - 100 MHZ = 27 dB TYP.
 - 300 MHZ = 16 dB TYP.
 - 500 MHZ = 17 dB TYP.
 - 1 GHZ = 13 dB TYP.

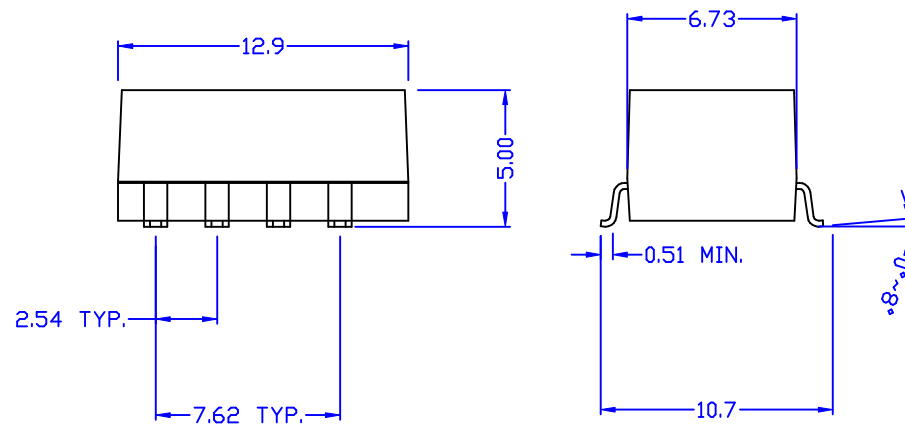

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE 8X2 LINE COMMON MODE CHOKE	
							DWG. NO. XTFZ-PL250	
	RELEASE	12/02/2004	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						12/02/04		