
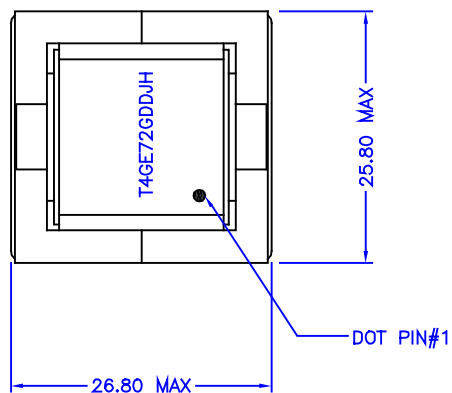


ELECTRICAL CHARACTERISTICS:

- DCR: PIN 4-9 = 0.25 OHM $\pm$ 12%.
PIN 3-8 = 5.60 OHM $\pm$ 12%.
PIN 5-6 = 0.21 OHM $\pm$ 12%.
- INDUCTANCE (@10KHZ, 1Vrms) :
PIN 4-9 = 225 uH $\pm$ 15%.
PIN 3-8 = 4.55 mH $\pm$ 15%.
PIN 5-6 = 110 uH $\pm$ 15%.
- TURN RATIO :
(@600KHZ, 1Vrms)
PIN 9-4:6-5 = 1.40 $\pm$ 1%.
(@1.3KHZ, 1Vrms)
PIN 8-3:9-4 = 4.57 $\pm$ 1%.
- HI-POT (@500VDC, 1mA, 2S) :
PIN 9-8, 9-6

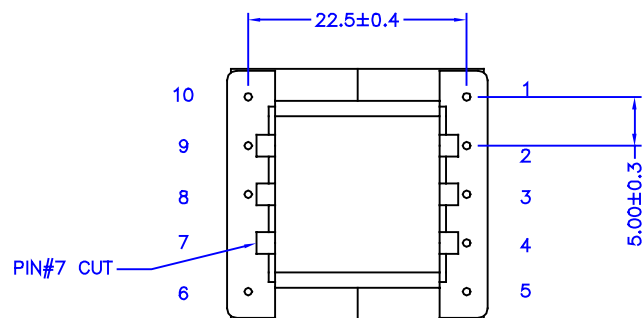

C	LABEL	05/31/2004	BART	AL	SUEDY	Atech® Atech Technology Co., Ltd. TEL:(02)2794-8867 FAX:(02)2794-8004	TITLE	TRANSFORMER
B	SPEC.	04/16/2004	BART	AL	SUEDY		DWG. NO.	ATC-04-006
A	SPEC.	04/05/2004	BART	AL	SUEDY			
	RELEASE	02/05/2004	BART	YEN	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	02/05/04	DRAW Pair