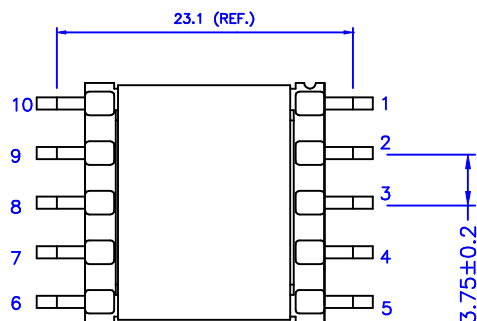

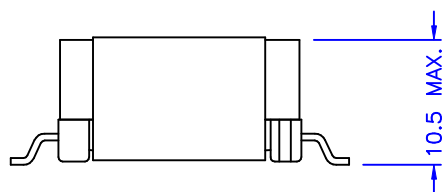
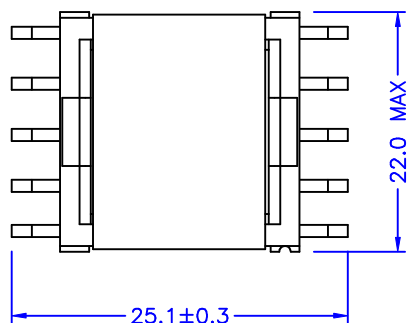


ELECTRICAL CHARACTERISTICS:

- DCR : PIN 1-4 = 9.5 mOHM MAX.
PIN 5-2 = 27.8 mOHM MAX.
PIN 6-9 = 1 OHM MAX.
PIN 7-10 = 9.2 mOHM MAX.
- INDUCTANCE (@1KHz, 0.25 Vrms) :
PIN 5-2 = 16 uH ±5%.
- TURN RATIO (@100KHz, 0.1Vrms) :
PIN 5-2 : 6-9 = 2.5 ±3%.
PIN 5-2 : 7-10 = 2.5 ±3%.
PIN 5-2 : 4-11 = 1 ±1%.
- HI-POT :
(@1800 VAC, 1mA, 2SEC 2-4, 7-9 SHORT) = PRI-SEC
- RoHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL: (02) 2794-6667 FAX: (02) 2794-8004		DWG. NO.
								ATC-04-078CR
RELEASE		05/19/2006	PAIR	AL	EUGENE	UNITS:	SAFETY	SHEET 1 OF 1
NO: DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	P/N:	DRAW
						05/19/06	CTW120007A	Pair