
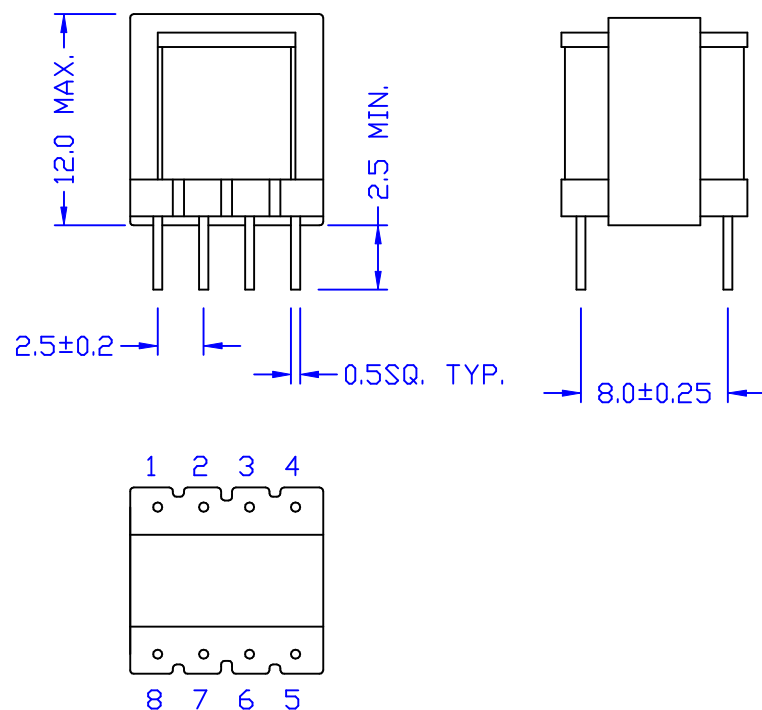
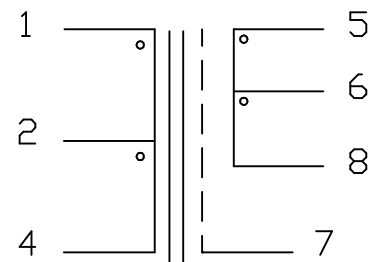


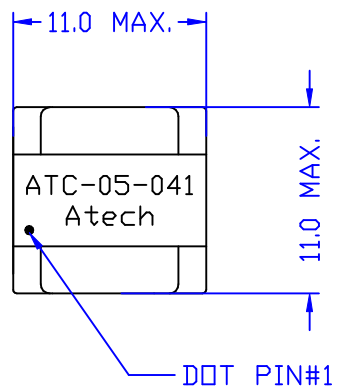

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 1.8 OHM MAX.
PIN 2-4 = 2.5 OHM MAX.
PIN 5-6 = 2.1 OHM MAX.
PIN 6-8 = 2.2 OHM MAX.
- INDUCTANCE (@10KHz, 0.1Vrms, ALC OFF) :
PIN 1-4 (W/O DC) = 10 mH MIN.
PIN 1-4 (W/H 10mA DC) = 7.5 mH MIN.
- INTERWINDING CAP (@10KHz, 0.1Vrms, ALC OFF) :
PIN 1-7 = 5-7 = 50 pF REF.
- TURN RATIO (@10KHz, 0.1Vrms) :
PIN 1-4:5-8 = 1 ±2%.
- HI-POT (@500VAC, 0.1mA, 2S) :
PRI-SEC.

						Atech®		TITLE TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATC-05-041	
A	線路4	03/15 /2006	PAIR	AL	EUGENE	UNITS: M/M		SAFETY	
	RELEASE	08/31 /2005	BART	EEFLYS	SUEDY	DATE 08/31/05		SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD			DRAW Pair	
REVISIONS									