

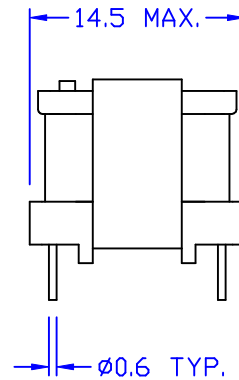
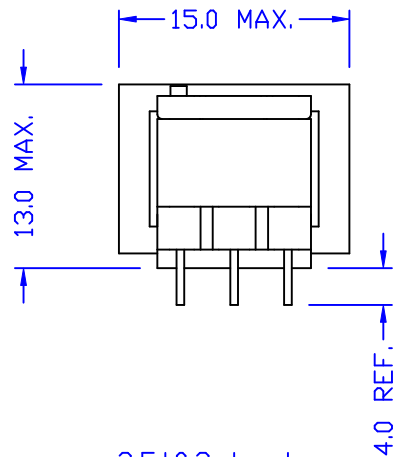
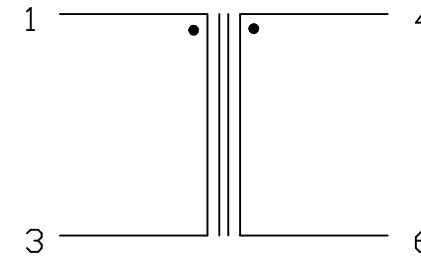



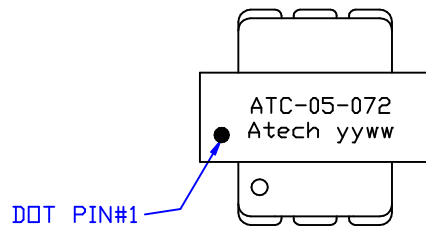

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 0.7 OHM MAX.
PIN 4-6 = 65 OHM MAX.
- INDUCTANCE (@1KHz, 0.1Vrms) :
PIN 1-3 = 3.9 mH MIN.
- TURN RATIO (@3KHz, 1Vrms) :
PIN 4-6:1-3 = 12 ±2%.
- IMPEDANCE (@600Hz, 0.1Vrms PIN 4-6 W/H 600 OHM) :
PIN 1-3 = 4.5 OHM ±10%.
PIN 1-3 (W/H 100mADC) = 4 OHM ±10%.
- HI-POT (@1250VAC, 10mA, 2S) :
PRI-SEC
- RoHS COMPLIANCE.

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:0212794-6667 FAX:0212794-8004		DWG. NO.
A	DATE CORE	03/02/2006	PAIR	lys	EUEGEN	UNITS:		ATC-05-072R
	RELEASE	12/26/2005	BART	LYS	SUEDY	M/M		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						12/26/05		Pair
						P/N		
						CTW214000A		