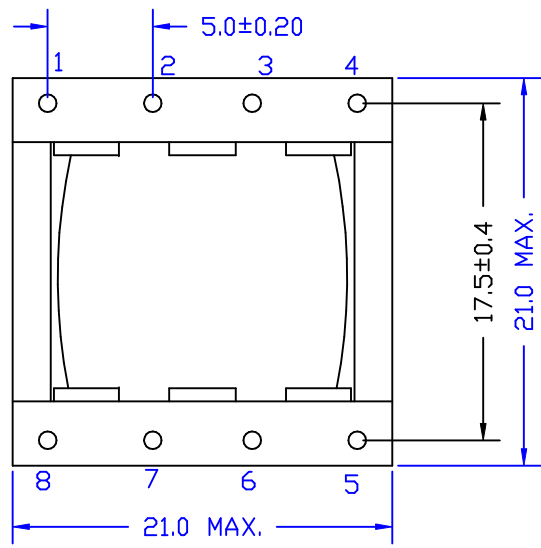
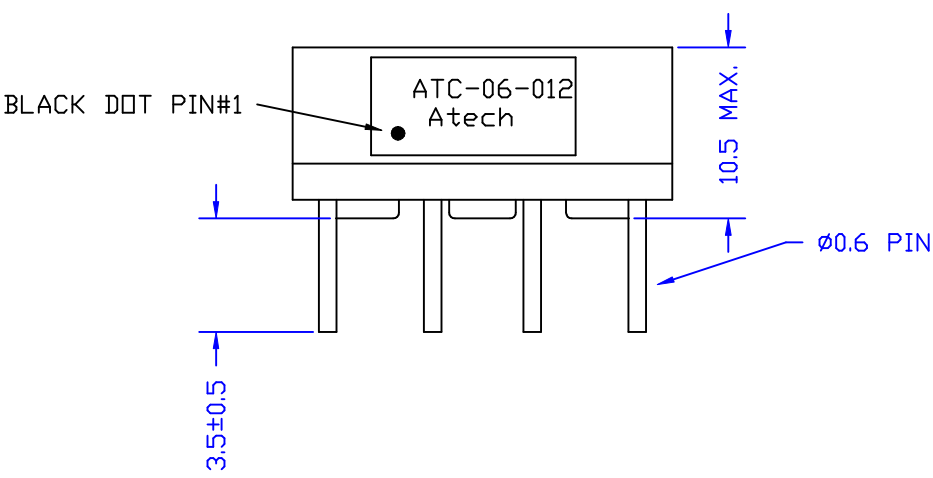


ELECTRICAL CHARACTERISTICS :

- 1. D.C.R. : PIN 2-3 = 0.17 OHM MAX.
PIN 5-6 = 0.82 OHM MAX.
PIN 7-8 = 6.2 OHM MAX.
- 2. INDUCTANCE(@128KHZ,0.1Vrms) :
PIN 2-3 = 93mH +/-2%
PIN 2-3 (W/H 1ADC) = 90mH MIN.
- 3. TURN RATIO (@ 1.5KHZ, 0.1Vrms) : PIN 8-7 : 2-3 = 2.3+/-2%
(@0.1Vrms, 700KHZ) : PIN 6-5 : 2-3 = 0.35+/-2%
- 4. HI-POT (@500VAC, 1mA, 2SEC) : 2-8 2-5

						Atech[®] Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE HDSL TRANSFORMER	
							DWG. NO. ATC-06-012	
	RELEASE	03/13 /2006	PAIR	LYS	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						03/13/06		