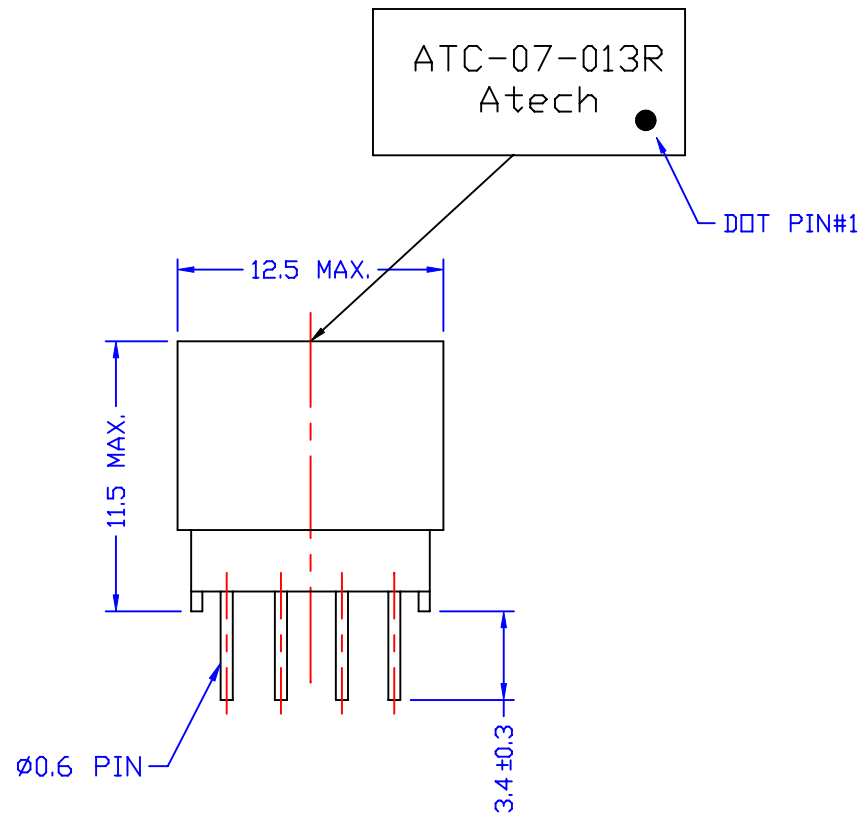


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-4 = 150 Ω HM $\pm$ 15%
PIN 8-5 = 225 Ω HM $\pm$ 15%
2. INDUCTANCE (@10KHZ, 1Vrms) : PIN 1-4 = 2.5mH MIN.
3. LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (8-5 SHORT) = 3uH MAX.
4. INTERWINDING CAP.@100KHZ,0.1Vrms) : PIN 1-8 = 18pF MAX.
5. TURN RATIO(@10KHZ,0.1Vrms) : PIN 1-4 : 8-5 = 1 $\pm$ 1%
6. HI-POT (@3.2KVAC, 1mA, 2S) : PIN 1-8

						Atech®		TITLE
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL:0212794-6667 FAX:0212794-8004		DWG. NO.
								ATC-07-013R
RELEASE		07/17/2007	PAIR	VINCEN	TEUGENE	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE		DRAW
						07/17/07		Pair