
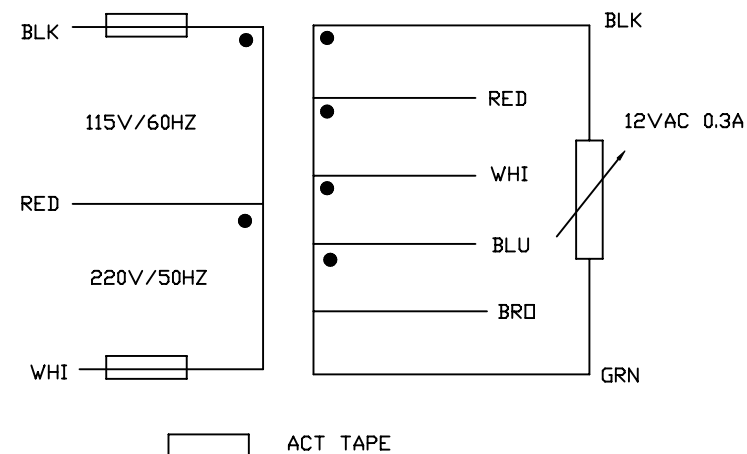
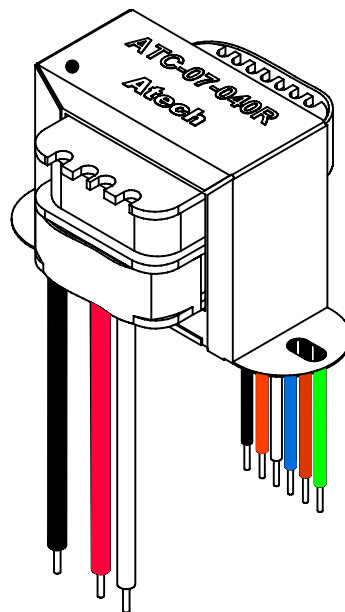
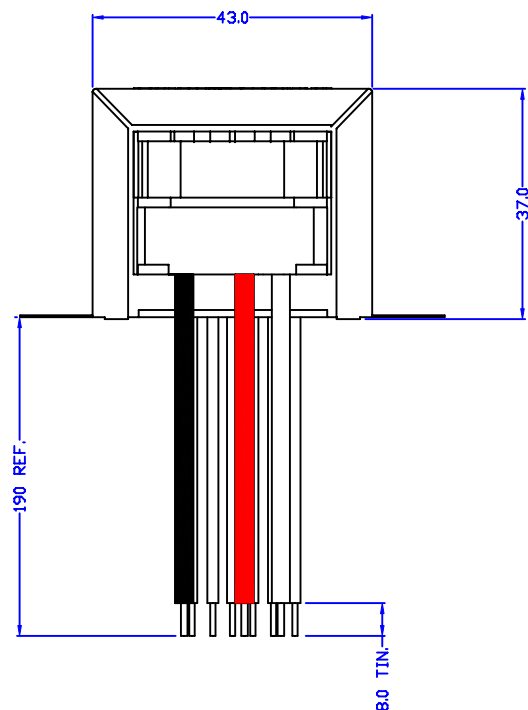


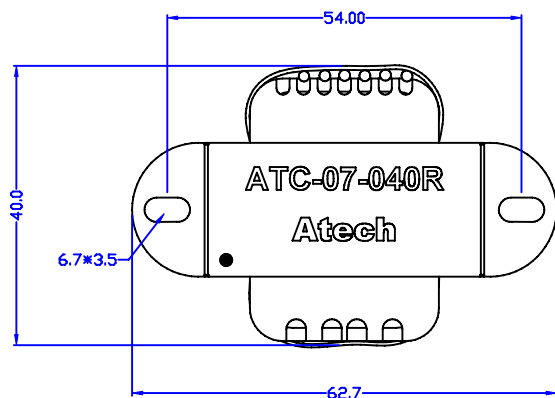

ELECTRICAL CHARACTERISTICS:

- 1.PRI. VOLTAGE:115VAC/220VAC,50/60HZ
- 2.PRI. EXCITING CURRENT:40mA MAX.
3. SECONDARY VOLTAGE<@115VAC/220VAC>

NO LOAD	
BLK-RED : 3.4V±5%	BLK-WHI : 5.0V±5%
BLK-BLU : 6.7V±5%	BLK-BRD : 10.1V±5%
BLK-GRN : 13.5V±5%	
300mA LOAD	
BLK-RED : 3.0V±5%	BLK-WHI : 4.5V±5%
BLK-BLU : 6.0V±5%	BLK-BRD : 9.0V±5%
BLK-GRN : 12.0V±5%	
4. HI-POT :(<@1.5KV,5mA,1MIN.) P-S,P-C,S-C
5. RoHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL:022794-6667 FAX:022794-8004		DWG. NO.
								ATC-07-040R
RELEASE		11/28/2007	Pair	Willie	Eugene	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M	P/N:	
REVISIONS						DATE		DRAW
						11/28/07		Pair