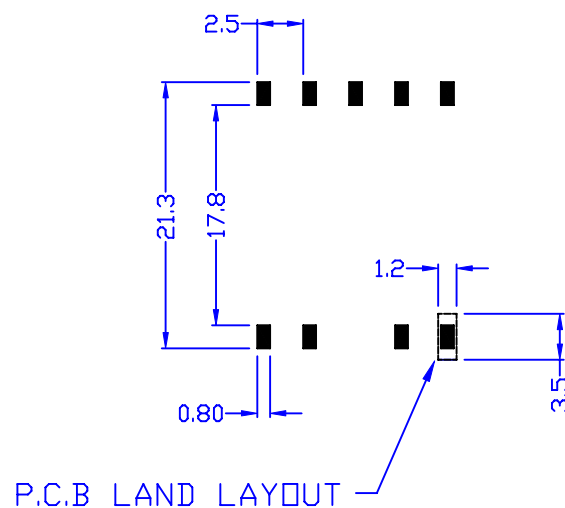
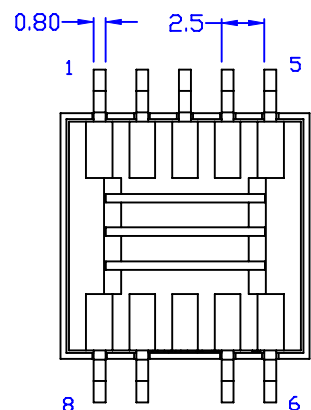





ELECTRICAL CHARACTERISTICS :

1. D.C.R : 1-2 = 117m Ω HM MAX.
2-3 = 101m Ω HM MAX.
6-9 = 870 Ω HM MAX.
2. INDUCTANCE(@10KHZ,0.1Vrms) : 1-2 = 174uH±5%
2-3 = 174uH±5%
6-9 = 4.8H ±5%
3. LEAKAGE INDUCTANCE(@100KHZ,0.12Vrms,6-9 SHORT)
1-3 = 20.9uH MAX.
4. TURN RATIO(@150KHZ,0.1Vrms):
9-6 : 1-3 = 84±1%
5. HI-POT(@1800VAC,1mA,2SEC) : 1-CORE,6-CORE
(@500VAC,1mA,2SEC) : 1-6
6. RoHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL:02)2794-6667 FAX:02)2794-8004		DWG. NO.
								ATC-08-002R
RELEASE		01/28/2008	Pair	Willie	Eugene	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M	P/N:	
REVISIONS						DATE		DRAW
						01/28/08		Pair