

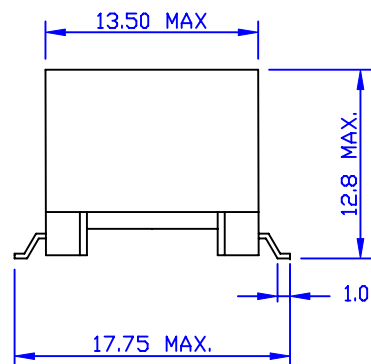


DOT PIN#1

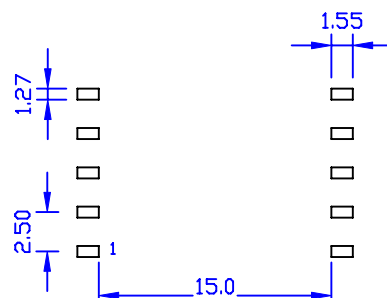

PCB LAND LAYOUT

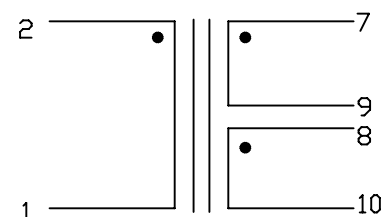

ELECTRICAL CHARACTERISTICS :

1. D.C.R : 1-2 = 108 mΩHM MAX. 7-9 = 8-9 = 40 mΩHM MAX.
2. INDUCTANCE(@20KHZ,0.2Vrms) : 1-2 = 40uH±10%
3. LEAKAGE INDUCTANCE(@200KHZ, 0.2Vrms, 7-8-9-10 SHORT) :
1-2 = 621nH MAX.
4. TURN RATIO(@200KHZ,0.2Vrms) :
2-1 : 7-9 = 2.5±1%
2-1 : 8-10 = 2.5±1%
5. HI-POT(@1500VAC, 1mA, 2SEC 8-9 SHORT) : PRI - SEC
6. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE TRANSFORMER
							DWG. NO. ATC-08-011R
	RELEASE	04/02/2008	Pair	Willie	Eugene		UNITS: M/M
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SAFETY
REVISIONS						04/02/08	SHEET 1 OF 1
							DRAW <i>Pair</i>