



DOT PIN#1




10.5 MAX.

3.5±0.5

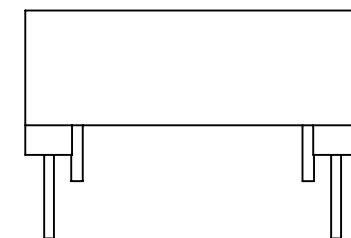

∅0.6

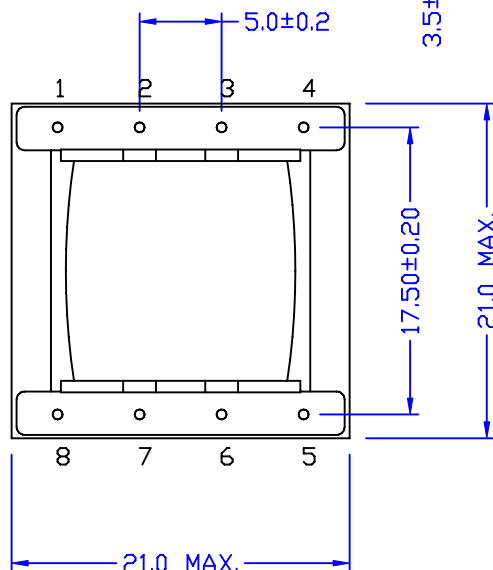


5.0±0.2

17.50±0.20

21.0 MAX.

21.0 MAX.

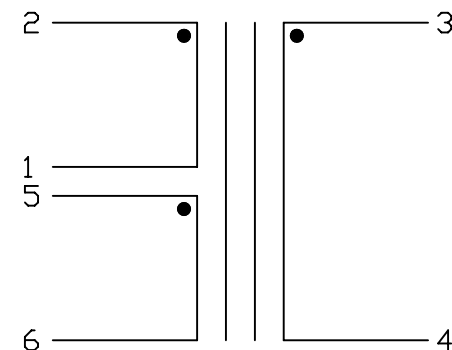

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 1.0 OHM ±15%.
PIN 3-4 = 0.09 OHM ±15%.
PIN 5-6 = 7.9 OHM ±15%.
- INDUCTANCE (@1KHZ, 10mVrms) :
PIN 5-6 = 5.5 mH ±7%.
- TURN RATIO (@25KHz, 1Vrms) :
PIN 5-6:2-1 = 2.95 ±1%.
PIN 5-6:3-4 = 6.07 ±1%.
- HI-POT (@500VAC, 1mA, 2SEC) :
PIN 5-2, 2-3, 3-5
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE TRANSFORMER	
								DWG. NO. ATC-97-017R	
	RELEASE	07/26/2006	PAIR	LYS	EUGENE	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						07/26/06		DRAW <i>Pair</i>	