
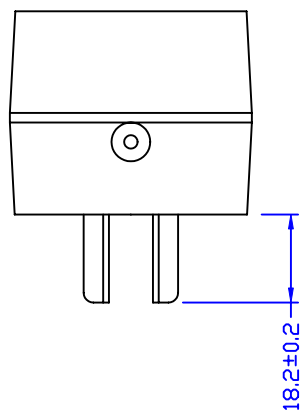


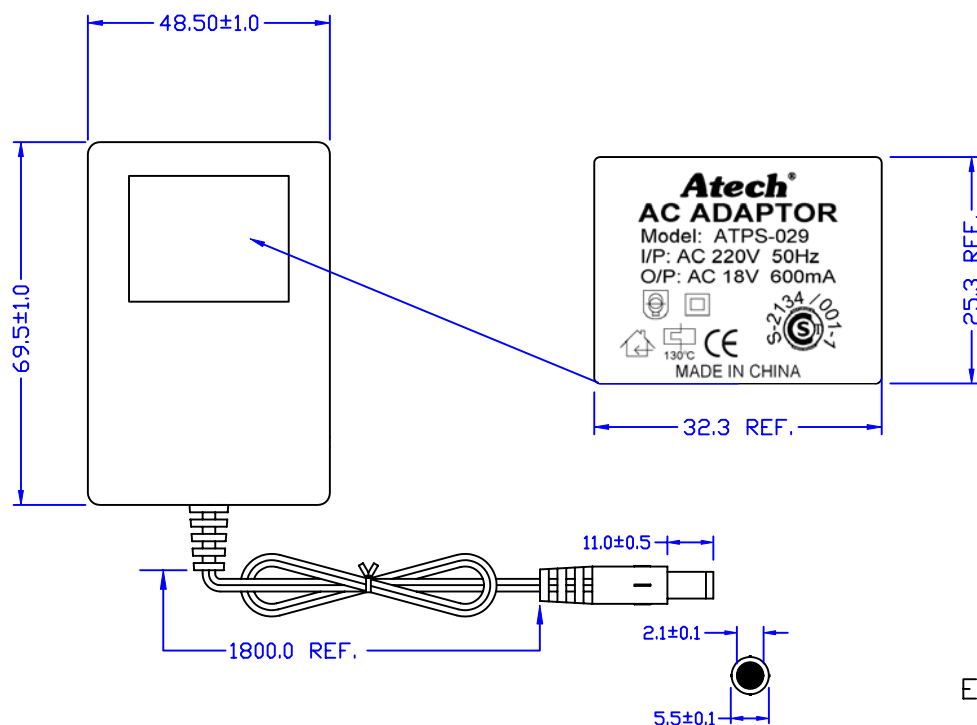

ELECTRICAL CHARACTERISTICS :

1. PRIMARY RATED VOLTAGE AND FREQUENCY : 220V 50Hz.
2. SECONDARY RATED VOLTAGE REGULATION :

I/P VOLTAGE	RATED VOLTAGE	RATE CURRENT	NO LOAD VOLTAGE
AC 220V/50Hz	AC 18.0V $\pm$ 5%	AC 600mA	AC 21.2 $\pm$ 5%

3. EXCITING CURRENT : INPUT PRIMARY 220V 50Hz 80mA MAX.
4. HI-POT TEST : INPUT 50Hz 3750V FOR ONE MINUTE BETWEEN PRIMARY AND SECONDARY AND BETWEEN PRIMARY TO CORE. 500V FOR ONE MINUTE BETWEEN SECONDARY TO CORE.
5. INSULATION TEST : 500V DC 100M OHM MIN. WINDINGS AND CORE.

						Atech®		TITLE AC - AC ADAPTOR	
B	LOGO	03/16/2005	BART	AL	SUEDY	Atech Technology Co., Ltd. TEL:02794-6667 FAX:02794-8004		DWG. NO.	ATPS-029
A	ADD LOGO	03/14/2005	BART	AL	SUEDY				
	RELEASE	02/04/2005	BART	AL	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						02/04/05		DRAW Pair	