
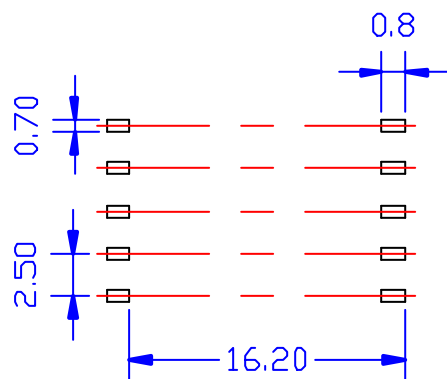
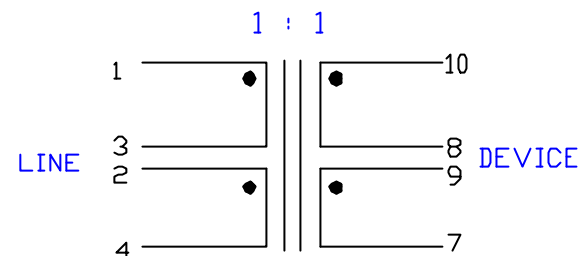
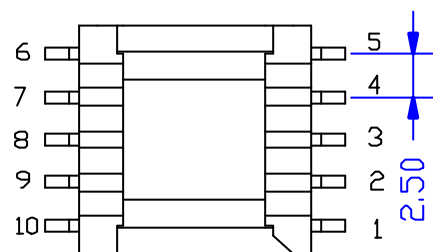
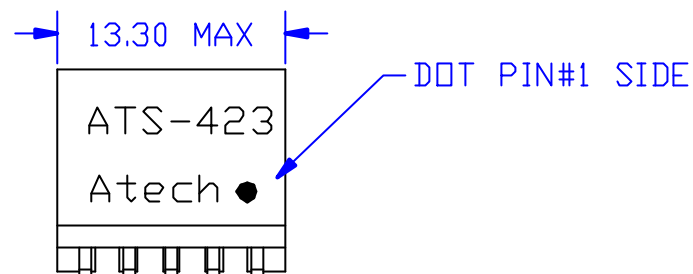


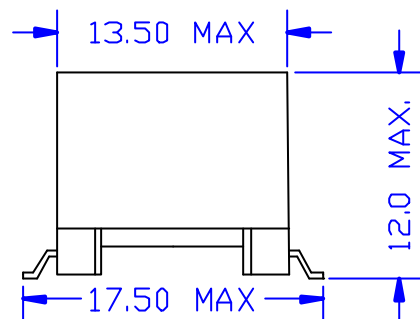

ELECTRICAL CHARACTERISTICS: (FOR ALCATEL ADSL CPE MEET IEC950)

1. D.C.R. : 1-3 = 2-4 = 0.52 OHM±12%, 10-8 = 9-7 = 0.42 OHM±12%
2. INDUCTANCE : (@10KHZ, 0.1Vrms) 1-4W/H (3-2 SHORT) = 440uH±5%
3. LEAKGE INDOCTANCE : (@300KHZ, 0.1Vrms,W/H 3-2, 10-7, 8-9, SHORT)
1-4 = 10uH MAX.
4. TURN RATIO : (@10KHZ, 1Vrms, W/H 3-2 , 8-9 , SHORT) 1-4 : 10-7 = 1±1%
5. HI-POT (@ 1875 VAC, 1mA, 1SEC) 1-10

						Atech® Atech Technology Co., Ltd. TEL (02)2704-6667 FAX(02)2704-8004		TITLE ADSL TRANSFORMER	
A	ADD FI	04/08/00	RORY		SUEDY			DWG. NO.	ATS-423
	RELEASE	11/05/99	PAIR		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW
REVISIONS						11/05/99			Pair