
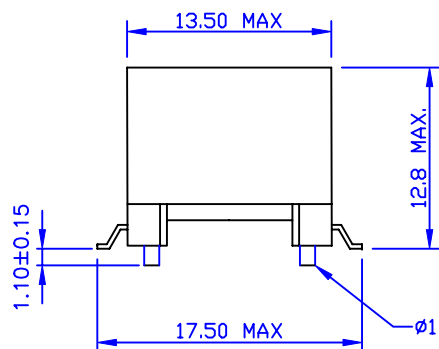
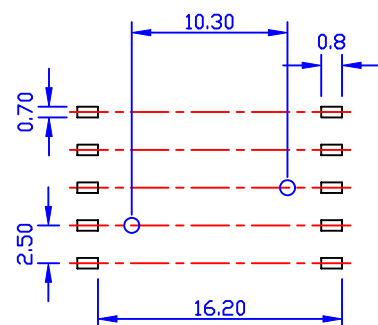


DOT PIN#1

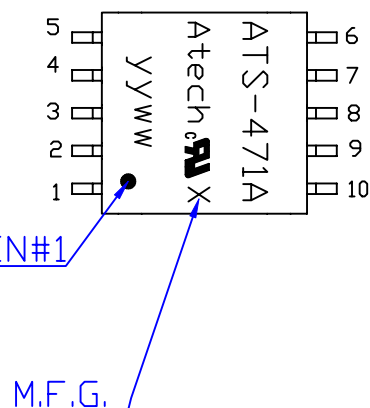

ELECTRICAL CHARACTERISTICS : (FOR ALCATEL CHIPSET)

1. D.R.C. : 1-3=2-4=0.58 OHM±12% 10-8=9-7=0.59 OHM±12%
2. INDUCTANCE : (@10KHZ, 0.1Vrms, W/H 2-3 SHORT) 1-4=470uH±5%
3. LEAKAGE INDUCTANCE : (@100KHZ, 0.1Vrms, 2-3, 8-9, 10-7 SHORT) 1-4=10uH MAX.
4. TURN RATIO : (@100KHZ, 0.1Vrms, 2-3, 9-8 SHORT) 1-4:10-7=1±1%
5. HI-POT : (@1875VAC, 1mA, 1SEC) PRI-SEC
6. WORKING TEMP : 0~70 DEG.C.

此圖面料號"ATS-471-1"爲一暫時性料號，僅供功能確認用。
經確認後將改回圖面料號爲:"ATS-471A"

F	SPEC.	04/27/2005	BART	AL	SUEDY	Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE	ADSL TRANSFORMER
E	MARKING	04/07/2004	BART	AL	SUEDY		DWG. NO.	ATS-471A-1
D	TEMP	05/22/2002	DOLLY	AL	SUEDY			
	RELEASE	12/22/2000	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW Pair
REVISIONS						12/22/00		