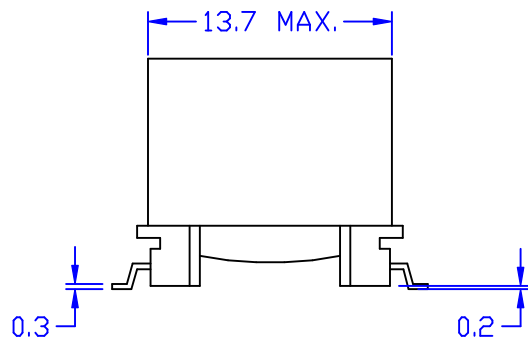
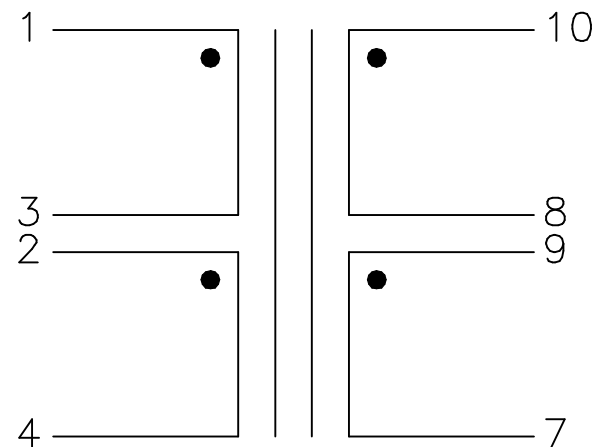
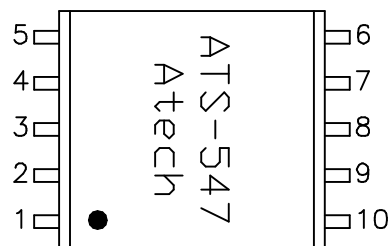


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 2-4 = 0.63 OHM $\pm$ 12%
PIN 10-8 = 9-7 = 0.9 OHM $\pm$ 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-4 (W/H 2-3 SHORT) = 475uH $\pm$ 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (W/H 2-3, 8-9, 10-7 SHORT) = 15uH MAX.
- TURN RATIO (@5KHZ, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) : PIN 10-7 (8-9 SHORT) = 1.414 $\pm$ 1%
- HI-POT (@1875VAC, 500uA, 1SEC) : PIN 1-10 (2-3, 8-9 SHORT)

						Atech®		TITLE ADSL TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:022794-6667 FAX:022794-8004		ATS-547	
RELEASE		09/25/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						09/25/01		DRAW Pair	