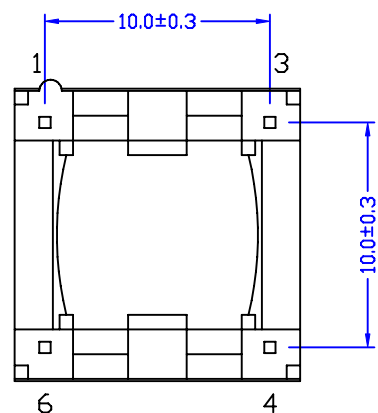
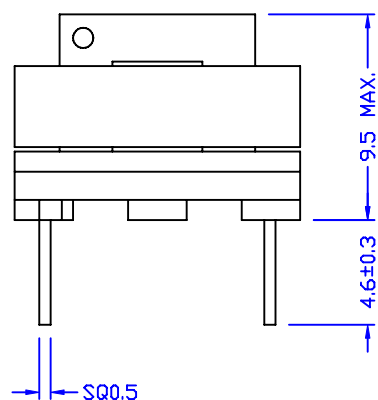
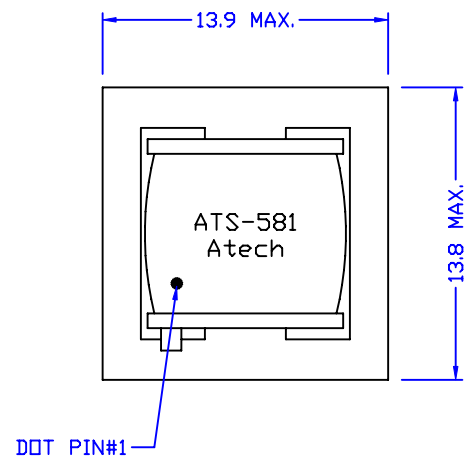


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-3 = 4-6 = 3.06 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-6 (3-4 SHORT) = 8mH ± 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 7.2mH MIN.
3. INDUCTANCE BALANCE : PIN 1-3 : PIN 4-6 = 1 ± 1%
4. TURN RATIO (@15KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 ± 2%
5. HI-POT (@500VDC, 1mA, 2SEC) : PIN 1-4

C	H = 9.5 MAX.	01/08/2003	DOLLY	AL	SUEDY	Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE	TRANSFORMER
B	TURN RATIO	10/31/2002	DOLLY	JEFF	SUEDY		DWG. NO.	ATS-581
A	DIMENSION	04/16/2002	DOLLY	JEFF	SUEDY			
	RELEASE	12/12/2001	DOLLY	JEFF	SUEDY	UNITS:	SAFETY	
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M		SHEET 1 OF 1
REVISIONS						DATE	P/N:	DRAW
						12/12/01	CTA913003A	Pair