
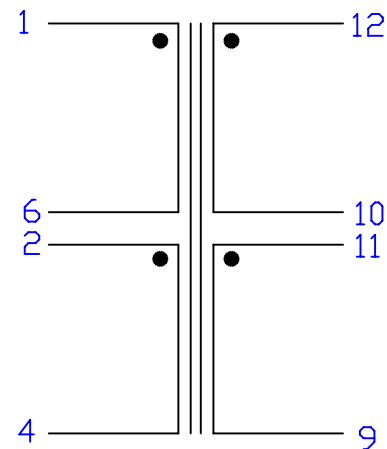
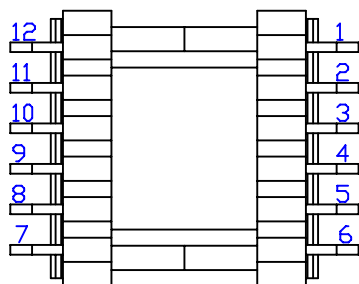
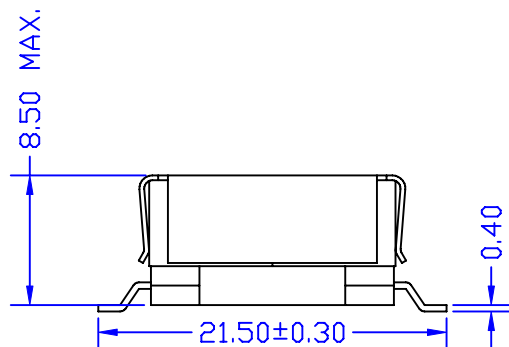


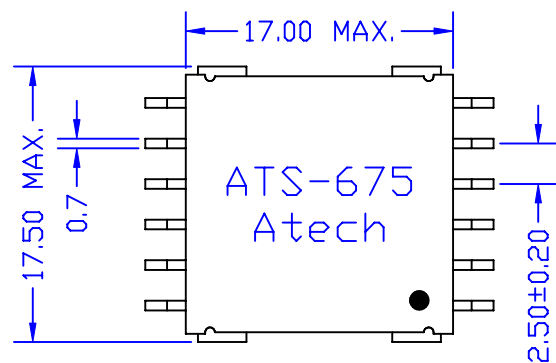

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 2-4 = 0.22 Ω HM MAX., PIN 1-6 = 0.33 Ω HM MAX.
PIN 12-10 = 11-9 = 0.02 Ω HM MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) : PIN 2-4 = 95 μ H $\pm$ 5%
(1ADC) : PIN 2-4 = 85 μ H MIN.
- TURN RATIO (@4KHz, 0.1Vrms) : PIN 2-4 : 1-6 = 2.125 $\pm$ 2%
PIN 2-4 : 12-10 = 8.5 $\pm$ 2%
PIN 2-4 : 11-9 = 8.5 $\pm$ 2%
- HI-POT (@500VAC, 1mA, 1SEC) : PIN 1-2
(PIN 10-11 SHORT) : PIN 2-12

						Atech [®]		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:02-2794-6667 FAX:02-2794-8004		DWG. NO.
								ATS-675
A	T/R	TOLERANCE	09/12/2006	PAIR	MICHAEL	EUGENE	UNITS:	SAFETY
	RELEASE		10/02/2003	RORY	AL	SUEDY	M/M	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	SHEET 1 OF 1
REVISIONS						10/02/03	CTX115004A	DRAW <i>Pair</i>