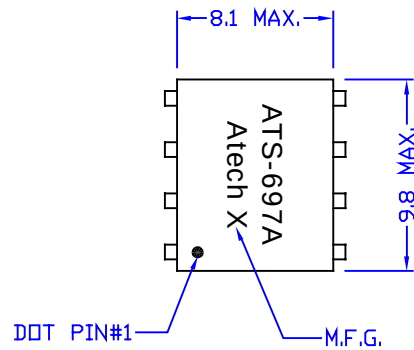


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 0.6 OHM MAX.
PIN 2-4 = 0.7 OHM MAX.
PIN 5-8 = 0.7 OHM MAX.
PIN 6-7 = 0.7 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1 Vrms) :
PIN 1-4 (2-3 SHORT) = 1mH ± 7%.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (2-3, 5-8, 6-7 SHORT) = 10.5uH MAX.
- TURN RATIO (@25KHZ, 1Vrms) :
PIN 1-4 : 8-6 (2-3, 5-7 SHORT) = 0.9 ± 1%.
- HI-POT (@1875VAC, 1mA, 2S) : P-S

						Atech®		TITLE ADSL LINE TRANSFORMER	
						Atech Technology Co., Ltd. TEL:02-794-6667 FAX:02-794-8004		DWG. NO. ATS-697A	
A	SPEC.	05/24 /2004	BART	AL	SUEDY	UNITS: M/M		SAFETY	
	RELEASE	05/20 /2004	PAIR	KEVIN	SUEDY	DATE 05/20/04		SHEET 1 OF 1	
NO	DESCRIPTION	DATE	BY	CHK	APPD			DRAW <i>Pair</i>	
REVISIONS									