
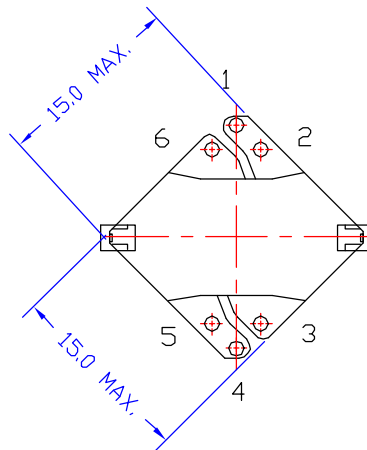
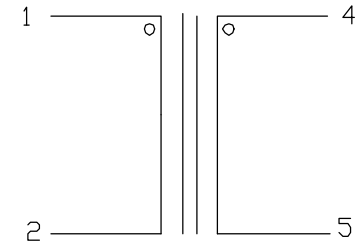
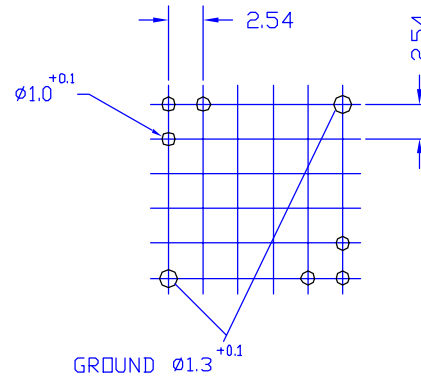


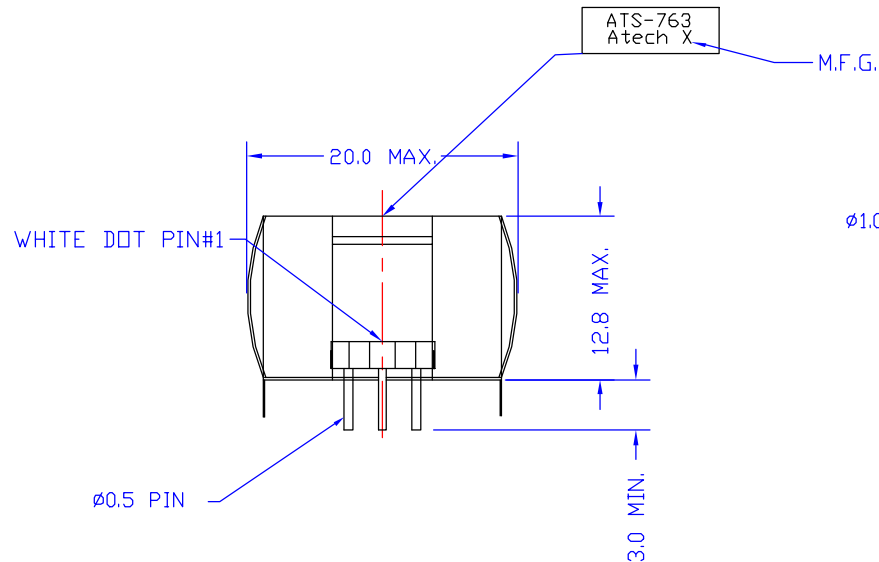

ELECTRICAL CHARACTERISTICS:

- DCR : PIN 1-2 = 60 OHM MAX.
PIN 4-5 = 75 OHM MAX.
- INDUCTANCE (@1KHz, 0.1Vrms) :
PIN 1-2 = 2.2 H MIN.
- IMPEDANCE (@1KHz, 0.1Vrms, PIN 4-5 W/H 475 OHM) :
PIN 1-2 = 600 OHM ±20%.
- INTERWINDING CAP. (@1KHz, 0.1Vrms) :
PIN 1-4 = 25 pF MAX.
- TURN RATIO (@1KHz, 0.1Vrms) :
PIN 1-2:4-5 = 1 ±2%.
- HI-POT (@1500VAC, 1mA, 2S) :
PRI-SEC.

						Atech® Atech Technology Co., Ltd. TEL«02»2794-6667 FAX«02»2794-8004	TITLE 600: 475 TRANSFORMER	
							DWG. NO. ATS-763	
	RELEASE	07/15/2005	BART	MICHAEL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						07/15/05		