
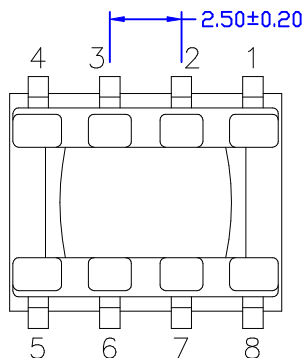


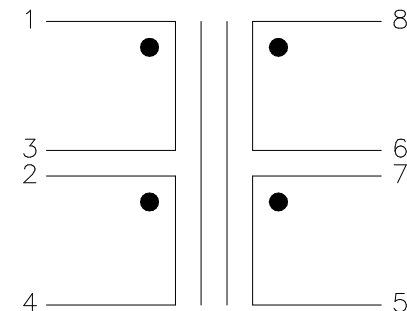
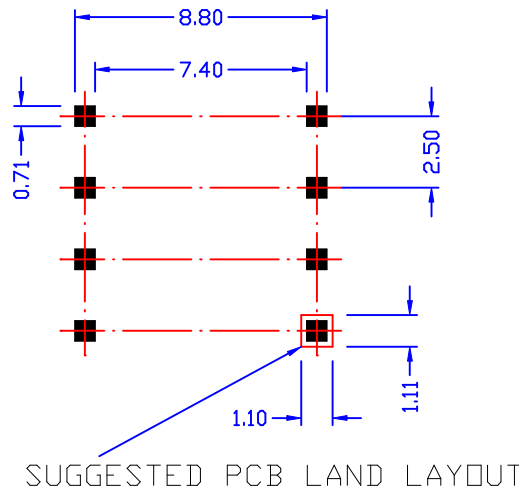


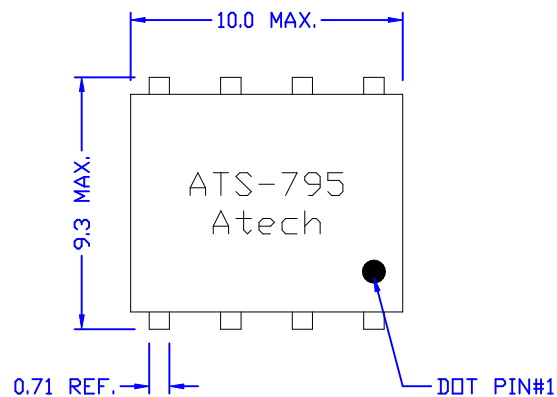

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 2-4 = 121 mΩ MAX.
PIN 5-7 = 22 mΩ MAX.
PIN 6-8 = 18 mΩ MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) = 109uH ± 10%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (2-3 5-8 6-7 SHORT) = 2.5 uH MAX.
- TURN RATIO : (@100KHZ, 0.1Vrms) :
PIN 1-4 : 8-5 (2-3 6-7 SHORT) = 4 ±1%.
PIN 2-4 : 1-3 = 1 ± 1%
- HI-POT : (@1875VAC, 1mA, 2SEC) :
PIN 1-8 (2-3 5-6 SHORT)
- RoHS COMPLIANCE.

						Atech®		TITLE	TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.	ATS-795R
						TEL:0212794-6667 FAX:0212794-8004			
RELEASE		12/27/2005	BART	MICHAEL	SUE DY	UNITS:	SAFETY		SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M			
REVISIONS						DATE	12/27/05		DRAW Pair