
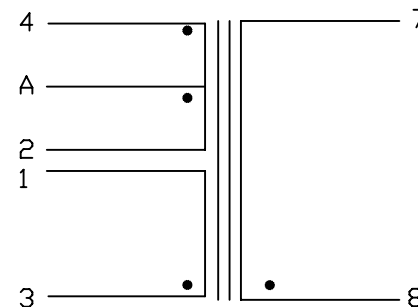
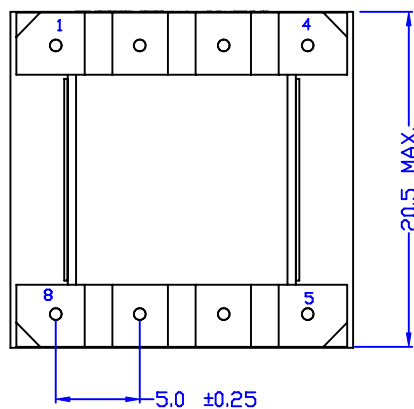
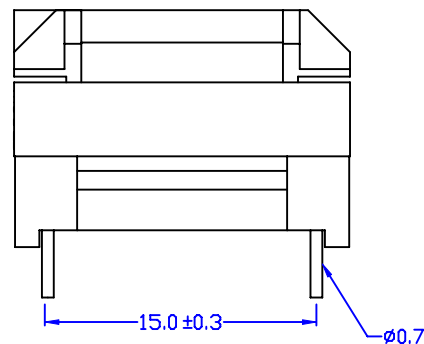
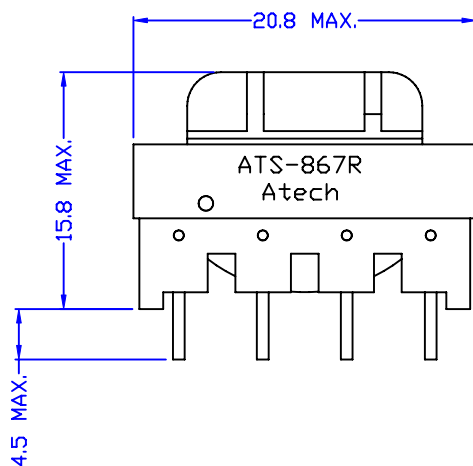


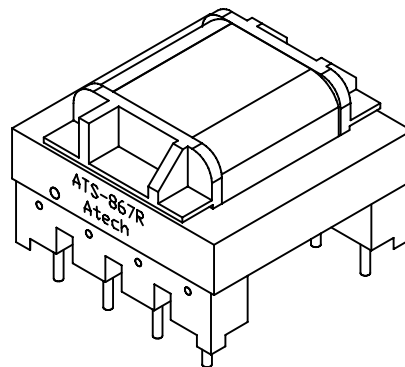

ELECTRICAL CHARACTERISTICS:

1. D.C.R : 1-3 = 155m Ω HM $\pm$ 10%
2-4 = 1.45 Ω HM $\pm$ 10%
7-8 = 38m Ω HM $\pm$ 10%
2. INDUCTANCE (@100KHZ, 1Vrms) : 2-4 = 900uH $\pm$ 10%
3. LEAKAGE INDUCTANCE(@100KHZ, 1Vrms) :
2-4(1-3-7-8, SHORT) = 10uH MAX.
4. TURN RATIO (@2.5KHZ,1Vrms):
2-4 : 1-3 = 6 $\pm$ 1%
2-4 : 7-8 = 6 $\pm$ 1%
5. HI-POT(@1.5KVAC,1mA,2SEC): 4-7 (1-2, SHORT)
6. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-867R	
	RELEASE	03/19/2008	PAIR	Vincent	Eugene	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:		DRAW <i>Pair</i>
REVISIONS						03/19/08			