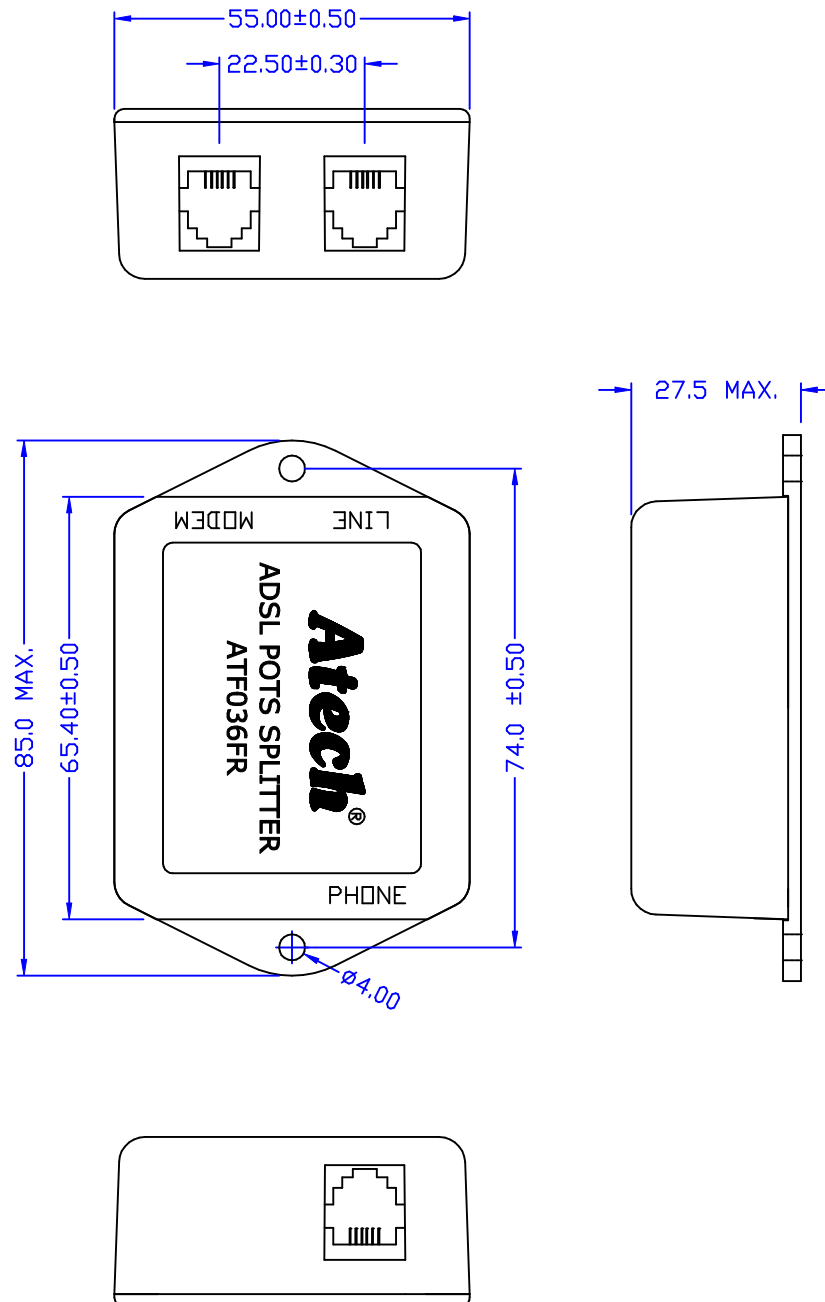


## ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 12.5 OHM MAX.
2. INSERTION LOSS : @1KHZ = 0.3dB MAX.
3. INSERTION LOSS DISTORTION : @200HZ-4KHZ =  $\pm 1$ dB
4. RETURN LOSS : @300HZ = 14dB MIN.  
@500HZ = 18dB MIN.  
@2KHZ-3.4KHZ = 14dB MIN.
5. LONGITUDINAL BALANCE : @15HZ = 40dB MIN.  
@50HZ = 46dB MIN.  
@600HZ-3.4KHZ = 52dB MIN.
6. ATTENUATION : @30KHZ-1.1MHZ = 65dB MIN.  
@1.1MHZ-2.2MHZ = 55dB MIN.
7. RoHS COMPLIANCE

|           |             |                |      |        |       |                                                                                                            |  |                               |                     |
|-----------|-------------|----------------|------|--------|-------|------------------------------------------------------------------------------------------------------------|--|-------------------------------|---------------------|
|           |             |                |      |        |       | <div>Atech®</div> <div>Atech Technology Co., Ltd.</div> <div>TEL: (02) 2794-6667 FAX: (02) 2794-8004</div> |  | TITLE   ADSL POTS<br>SPLITTER |                     |
|           |             |                |      |        |       |                                                                                                            |  | DWG. NO.           CSA06000KA |                     |
|           | RELEASE     | 01/20<br>/2006 | PAIR | EUGENE | SUEDY | UNITS:<br>M/M                                                                                              |  | SAFETY                        | SHEET 1 OF 1        |
| NO.       | DESCRIPTION | DATE           | BY   | CHK    | APPD  | DATE<br>01/20/06                                                                                           |  |                               | DRAW<br><i>Pair</i> |
| REVISIONS |             |                |      |        |       |                                                                                                            |  |                               |                     |