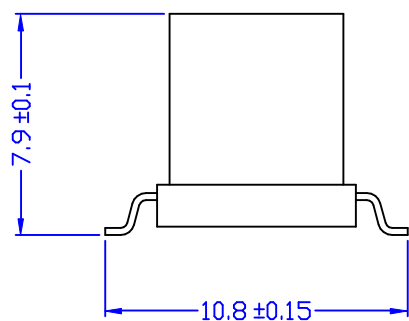
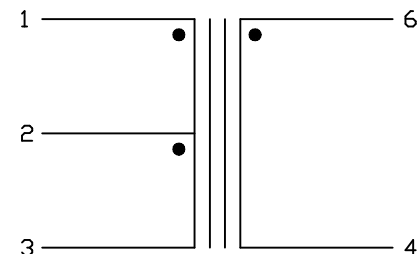
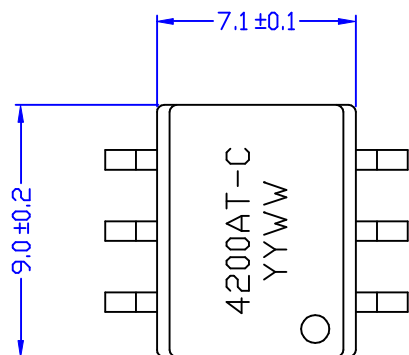


ELECTRICAL CHARACTERISTICS:

- DCR : PIN 1-3 = 460 mOHM MAX.
PIN 4-6 = 590 mOHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms)
PIN 1-3 = 2.4mH +/-30%
- LEAKAGE INDUCTANCE (@10KHZ, 0.1Vrms)
PIN 1-3 (4-6 SHORT) = 2000nH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms)
PIN1-6 = 30pF MAX.
- TURN RATIO (@20KHZ, 0.1Vrms)
PIN 6-4 : 1-3 = 1.294+/-2%
- HI-POT (@2KVAC, 1mA, 2S) PIN 1-6

C	ELECTRICAL CHARACTERISTICS	10/22/2003	PAIR	JEFF	SUEDY	Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE	TRANSFORMER
B	DATE CODE	05/06/2002	DOLLY	JEFF	SUEDY		DWG. NO.	4200AT
A	MARKING	11/23/2001	DOLLY	JEFF	SUEDY			
	RELEASE	11/15/2001	DOLLY	JEFF	SUEDY			
NO	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	SHEET 1 OF 1
REVISIONS						DATE 11/15/01		DRAW Pair