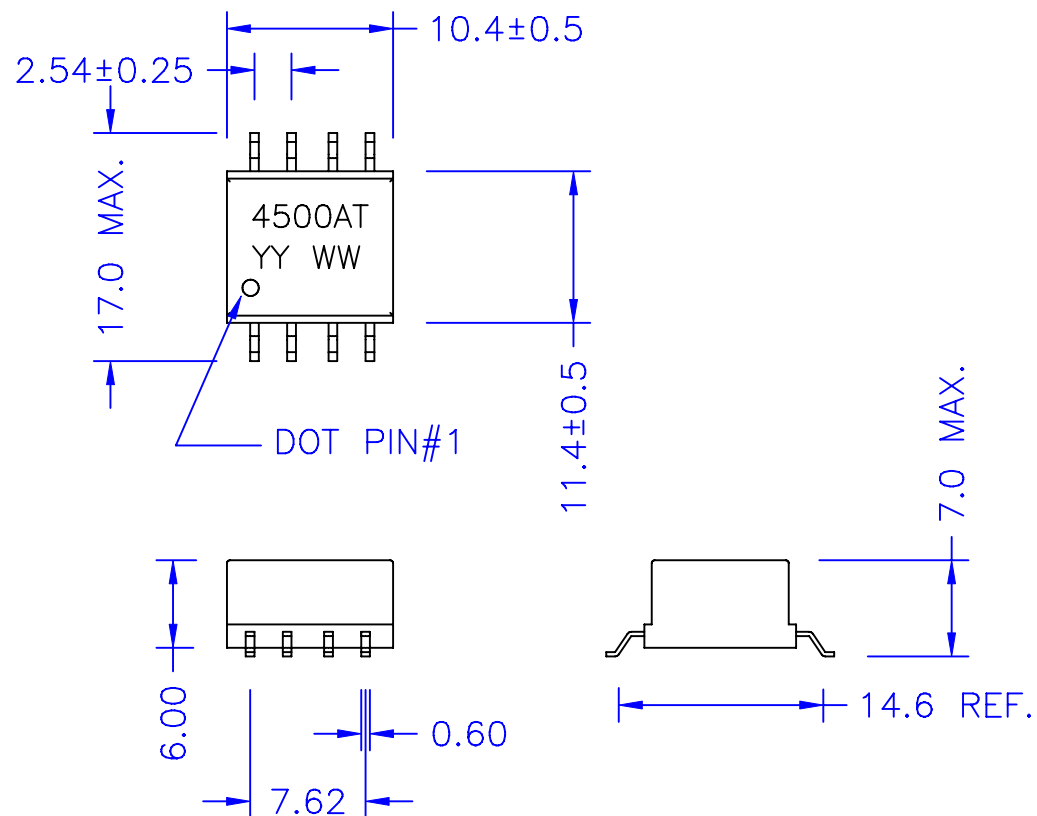


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1 -2 = 3-4 = 0.4 OHM MAX.
PIN 5-8 = 0.7 OHM MAX.
2. INDUCTANCE (@100KHz, 0.1Vrms) : PIN 1-4(2-3 SHORT) = 2.4mH $\pm$ 30%
3. LEAKAGE INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-4 (2-3 , 5-8 SHORT) = 2uH MAX.
4. INTERWINDING CAP. (@10KHz, 0.1Vrms) : PIN 1-8(2-3 SHORT) = 30pF MAX.
5. TURN RATIO (@20KHz, 0.1Vrms) : PIN 8-5 : 1-4(2-3 SHORT) = 1.294 $\pm$ 2%
6. HI-POT : (@5000VAC, 1mA, 2SEC) : PIN 1-8(2-3 SHORT)
7. LEAD FREE.

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:(02)2794-6667 FAX:(02)2794-8004		DWG. NO.
A	INDUCTANCE TEST	05/02/2007	PAIR	MICHAEL	EUGENE	UNITS:		4500ATN
	RELEASE	06/03/2005	BART	AL	SUEDY	M/M		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						06/03/05		Pair