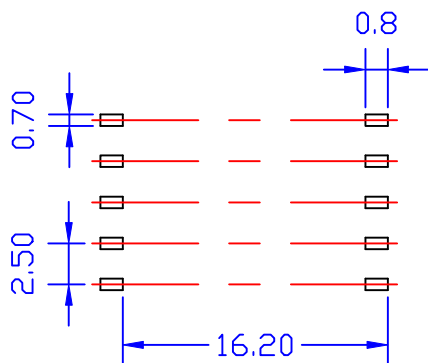


ELECTRICAL CHARACTERISTICS : (FOR ALCATEL ADSL CPE)

1. D.C.R. : PIN 1-4 (2-3 SHORT) = 3.2 OHM MAX.
PIN 10-7 (9-8 SHORT) = 3.2 OHM MAX.
2. TURNS RATIO : (@60KHZ, 1Vrms) 10-8 : 9-7 : 1-3 : 2-4 = 1+/-1%.
3. INDUCTANCE : (@10KHZ, 0.1Vrms) 10-7 (8-9 SHORT) = 470 uH+/-5%.
4. LEAKAGE INDUCTANCE : (@10KHZ, 0.1 Vrms,W/H 1-4,2-3,8-9 SHORT)
10-7 = 10uH MAX.
5. CW : (@10KHZ, 0.1Vrms, 2-3, 8-9 SHORT) 1-10 = 50 pF MAX.
6. L/B : (@20KHZ- 1.1 MHZ) 40dB MIN.
7. HI-POT : (@2100VAC, 1mA, 6SEC) PRI.-SEC.

C	部位	08/28/2001	DOLLY	CPLIU	SUEDY	 Atech [®] Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE ADSL TRANSFORMER	
B	LABEL	08/22/2001	DOLLY	AL	SUEDY		DWG. NO.	
A	LEAKAGE 1-4, 2-3 SHORT	/00	PAIR		SUEDY		ATS-376	
	RELEASE	04/06/99	PAIR		SUEDY			
NO	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	SHEET 1 OF 1
REVISIONS						DATE 04/06/99		DRAW <i>Pair</i>